




10/13/00

10/16/00

IN THE UNITED STATES PATENT AND TRADEMARK

Box New Patent Application
 Assistant Commissioner for Patents
 Washington, D.C. 20231

Attorney's Docket No.: 18659-23



FILING TRANSMITTAL

Transmitted herewith for filing is the Patent Application of Van Dyke, et al.:

FOR: "A CONTROLLER FOR A MEMORY SYSTEM HAVING MULTIPLE PARTITIONS"

ENCLOSURES

- ☒ 22 page application including specification, claims and abstract;
☒ 19 sheets (Figs. 1-10) of ☒ informal/☐ formal drawings;
☒ A Declaration, Power of Attorney & Petition (☐ signed/☒ unsigned);
☒ A postcard for return to us as proof of receipt of the referenced documents.
and
☐ An Assignment of the invention with an assignment cover sheet;
☐ Verified Statement Claiming Small Entity Status (37 CFR 1.9(f) and 1.27(b));
☐ IDS (form PTO-1449) and copies of references;
☐ An Associate Power of Attorney;
☐ A certified copy of the priority document (Under 35 USC 119);
☐ A Power of Attorney by Assignee;
☐ Other.

TYPE OF FILING

- ☐ This application claims the benefit of an earlier filed U.S. Patent Application (35 USC 120).
☐ This application claims the benefit of the priority date of an earlier filed provisional patent application Serial No. (35 USC 119).
☐ This is an application filed pursuant to 37 CFR 1.53, permitting receipt of a filing date upon filing of specification, claims and drawings, if required, with applicant being given a period of one month from the date of notice to file the fee and oath or declaration.
☐ In the event any parts of this application are missing, please treat this as a filing under 37 CFR 1.53 as defined just above.

CERTIFICATE OF MAILING (37 CFR 1.10(a))

CERTIFICATE OF MAILING BY "EXPRESS MAIL" - Rule 10: I hereby certify that this correspondence is being deposited on October 13, 2000 with the U.S. Postal Service "Express Mail Post Office to Addressee" under 37 CFR 1.10 as **Express Mail No. EL654881622US** addressed to: Box New Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231

Date: October 13, 2000


 Cheryl Ann Rogers

FEE CALCULATION

The filing fee has been calculated as shown below:

				SMALL ENTITY	OR	OTHER THAN A SMALL ENTITY	
BASIC FEE Design Patent				\$160	\$	\$320	\$
BASIC FEE Utility Patent				\$355	\$	\$710	\$710
EXTRA FEES				RATE	FEE	RATE	FEE
Total claims	31	minus 20 =	11	x0 =	\$0	x18 =	\$198
Independent Claims	3	minus 3 =	0	x0 =	\$0	x78 =	\$
<input type="checkbox"/> Multiple Dep. Claim				+135 =	\$	+270 =	\$
<input type="checkbox"/> Assignment				+40 =	\$40	+40 =	\$
<input type="checkbox"/> Rule 53 Surcharge				+65 =	\$	+130 =	\$
TOTAL					\$		\$908.00

FEE PAYMENT

- ☒ Attached is Check No. 24512 in the sum of \$ 908.00 to cover the filing fee.
- ☐ Please charge Account No. 02-3964 the sum of \$ _____

FEE DEFICIENCY

- ☐ Please charge Account No. 02-3964 in the sum of \$ _____
- ☒ The Commissioner is authorized to charge (or credit any overpayment) to deposit account No. 02-3964:
- ☐ Any additional filing fees required under 37 CFR 1.16, except Rule 53 filings, which will be paid within the time permitted by PTOL 1533.
 - ☐ Assignment Recordal fees.
- ☒ The filing fee and surcharge under 37 CFR 1.16, patent application processing fees under 37 CFR 1.17 and patent issue fees under 37 CFR 1.18 are intended to be paid by our firm as they arise. As no abandonment is intended by any inadvertent nonpayment of fees, the Commissioner is hereby authorized to charge payment of such fees as from time to time come due, if not paid prior to due date to our Deposit Account No. 02-3964.
- ☐ A duplicate copy of this sheet is enclosed.

Dated: October 13, 2000

Respectfully submitted,



Claude A.S. Hamrick

Reg. No: 22,586

OPPENHEIMER WOLFF & DONNELLY LLP
CUSTOMER NUMBER 25696

A CONTROLLER FOR A MEMORY SYSTEM HAVING MULTIPLE PARTITIONS

CROSS-REFERENCE TO RELATED APPLICATIONS

5 FIELD OF THE INVENTION

The present invention relates generally to memory controllers in a computing system and more particularly to a controller for a memory system in which the storage array is partitioned into a number of independent sections.

10 DESCRIPTION OF THE RELATED ART

In current graphics subsystems, the speed and number of graphical processing elements has increased enough to make the graphics memory subsystem a barrier to achieving the higher performance that these elements may be capable of achieving. Typical graphics processing elements which are the memory clients include the host processor, a texture engine, a z-buffer engine, a color engine, a 2D-graphics engine, a 3D-graphics engine and a display engine.

FIG. 1 shows a graphics memory controller of the prior art. The memory controller 10 acts as a switch to determine which of several graphics processing clients 12, 14, 16, 18, 20 can access the memory storage array 22, which is organized as a single, i.e., monolithic, partition. Each client requests one or more cycles of the memory storage array 22 which transfers, in each cycle, a data quantity equal to the size of the data bus of the array.

Monolithic memory subsystems for the various graphics clients have evolved in an attempt to overcome this barrier chiefly by using a wider memory data bus for increased throughput. Memory busses in current architectures are now 128 bits physically, and 256 bits (32 bytes), effectively, when the minimum data transfer requires both phases of single clock cycle. (Hereinafter, when referring to the size of the data bus, the effective size, rather than physical size is meant.) The size of the memory data bus sets the size of the minimum access that may be made to the graphics memory subsystem and for some devices that make use of the graphics memory, 32 bytes is an acceptable minimum.

However, for many devices in a graphics subsystem, a minimum size of 32 bytes is inefficient. As geometry objects become smaller and finer, a minimum access of 32 bytes transfers more data than is needed by the various graphics engines for the geometry object. One

measure of fetching efficiency of the access is the ratio of pixels used for the geometry object to pixels fetched during an access. As the size of the memory bus increases or the minimum access increases, this ratio becomes smaller. A small ratio implies a large amount of wasted memory throughput in the graphics memory subsystem.

FIG. 2 shows a plot of the fetching efficiency of the prior art system of FIG. 1, in which the fetching efficiency is plotted on the vertical scale and the relative number of pixels per triangle is plotted on the horizontal scale. The plot shows that, as the number of pixels per triangle decreases, the fetching efficiency also decreases to a point that becomes unacceptably low for small triangles, i.e., triangles having approximately 10 to 100 pixels. At that point more than half the data fetched is not used for the triangle.

Thus, it is desirable to improve the fetching efficiency to the local memory storage but without altering the view to the memory clients of memory as a single unit to maintain compatibility with existing memory clients.

Monolithic memory subsystems are also inefficient in another way. Because the topology of the array is such that the entire or substantial part of the address path and the control path must reach each device that makes up the memory array, the electrical load on these paths is quite high. This leads to a slower cycle time for the array which translates into a loss of throughput than the array can supply. A partial answer to this problem is the replication and buffering of the address and control paths to portions of the array, which has the effect of increasing the cost of the array to gain a portion of the lost performance.

Therefore, there is a need to improve the efficiency of the memory access and the topology of the array without changing the existing memory clients. Improved efficiency and topology would lead to higher throughputs from the memory array and would lead to better use of the available memory throughput by the graphics subsystem thereby improving the performance of the graphics subsystem without a major impact on the memory clients.

BRIEF SUMMARY OF THE INVENTION

The present invention meets the above need. A system in accordance with the present invention includes a plurality of memory partitions each operable to service a memory request independently of other memory partitions. The memory request includes information specifying a location of requested data in the memory subsystem and a data transfer size for the request. A

plurality of client queues, one for each memory client and each partition is also included along with a plurality of routing circuits, wherein one routing circuit is connected to each memory client and to the client queues. Each routing circuit is operative to determine for each request, independently of the other requests, one or more partitions needed to service the request based on the specified location and transfer size, and each routing circuit is operative to route and store, independently of the other requests, each of the requests in the client queues of the one or more servicing partitions. Further included are a plurality of arbiter circuits, one arbiter circuit connected to each partition and to the client queues for the partition, where each arbiter circuit is operative to select, independently of other partitions, based on a priority policy, a request for servicing from one of the client queues for the partition, and to transfer each of the selected requests, independently of the other selected requests, to the servicing partition.

A method of servicing memory requests from at least one memory client in accordance with the present invention includes the following steps. First, at least one memory request from the at least one client is received, where the memory request is directed to a memory subsystem having a plurality of independently operable partitions and includes information specifying a location of requested data in the memory subsystem and a data transfer size for the request. Next, one or more partitions needed to service the request based on the specified location and transfer size are determined and the request is routed to each of the one or more servicing partitions. Following this, the routed request is serviced at each servicing partition independently of the other servicing partitions.

One advantage of the present invention is that, for a given memory size, each partition comprises a smaller number of devices. This reduces or eliminates the need for buffered and replicated address and control paths to the devices thereby improving the topology and cycle time of the partition and therefore the memory system.

Another advantage of the present invention is that, if a client requires only a small transfer, then only a few partitions, perhaps a single partition, of the total memory array is involved in the transfer. This leaves the other partitions of the memory array free to perform other small transfers, thus improving the deliverable throughput of the array. Larger transfers are still possible by splitting the request into a number of smaller requests and submitting the multiple requests to the individual partitions for service.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other features, aspects and advantages of the present invention will become better understood with regard to the following description, appended claims, and accompanying drawings where:

5 FIG. 1 shows a graphics memory controller of the prior art;

FIG. 2 shows the fetch efficiency of the prior art;

FIG. 3 shows a high-level block diagram of a system in accordance with the present invention;

10 FIG. 4 shows the partitioning of the memory in which the memory as linear array of bytes is mapped to the partitions in an interleaved fashion;

FIG. 5A shows a block diagram for the address, command and write data path for the memory system of the present invention;

FIG. 5B shows one implementation of the router of FIG. 5A;

FIG. 5C shows another implementation of the router of FIG. 5A;

15 FIG. 6A shows a block diagram for the read data path in accordance with one version of the present invention;

FIG. 6B shows a block diagram for the read data path in accordance with one version of the present invention with partition-size interface hardware;

20 FIG. 6C shows an implementation of the interface hardware included in the multiplexer circuitry of FIG. 6B;

FIG. 6D shows another implementation of the interface hardware included in the multiplexer circuitry of FIG. 6B;

FIG. 6E shows another block diagram for the read data path in accordance with another version of the present invention with partition-size interface hardware;

25 FIG. 6F shows an implementation of the interface hardware included in the multiplexer circuitry of FIG. 6E;

FIG. 6G shows another implementation of the interface hardware included in the multiplexer circuitry of FIG. 6E;

FIG. 6H shows an implementation of the read data path using sequence counts;

30 FIG. 7 shows an alternative embodiment of the command and write data path having an arbiter that permits multiple clients to share a router and client queues;

FIG. 8 shows another alternative embodiment of the command and write path in which the arbitration for access to a partition is in two parts;

FIG. 9 shows yet another alternative embodiment of the command and write path in which the translation block for requester is removed; and

FIG. 10 shows the degree of improvement of the present invention over the prior art.

DETAILED DESCRIPTION OF THE INVENTION

FIG. 3 shows a high-level block diagram of a system in accordance with the present invention. The figure shows that the memory array 24 has an number of independently operable partitions 26a, 26b, 26c 26d, each with a bus 28a-28d and a bus 27a-27d having a width w that is preferably a smaller transfer size than the single prior art bus 15 in FIG. 1. In one embodiment, there are four independent partitions P0-P3 26a, 26b, 26c 26d each with a bus one quarter the size of the non-partitioned bus, i.e., each with a 64 bit bus. Each of the memory system clients 12-20 is connected as before to the memory controller 30 which presents a non-partitioned view of the memory to the clients. The memory controller 30 includes a number of queues 32, 34, 36, 38, 40, 42, 44, 46 that connect to the memory array of each partition and control logic (not shown in FIG. 2) that determines the one or more partitions to which a request should be routed and the one or more partitions from which a response (read data) to a request should be obtained to maintain the appearance of a non-partitioned memory for the clients. Additionally, the control logic in the memory controller arbitrates among the various clients according to a priority assigned to each of the clients.

Partitioning of the memory is shown in FIG. 4 and involves mapping a linear array of bytes to the partitions in an interleaved fashion. In particular, ranges of byte addresses in the linear array are mapped to the various partitions 26a-26d. Preferably, the mapping is such that the lower address bits are mapped to a particular partition so that the memory load is approximately evenly balanced over the partitions. In one embodiment, each partition is mapped to an 8 byte range of memory locations. In a different embodiment, each partition is mapped to a 16 byte range of memory locations but any size mapping can be used without departing from the spirit and scope of the invention. A memory access request can start on any partition and end on any partition as long as it does not wrap around and touch the starting partition. If the transfer

size of a request is so large that it would violate this rule, then the request, itself, is broken up to multiple requests each satisfying the rule.

If the bus size of a partition is smaller than the range of locations mapped to that partition then multiple accesses are made of the partition until the range of locations in the linear map for that partition is satisfied. For example, if a partition is mapped to a range of locations spanning 16 bytes, but the data bus for the partition is only 8 bytes, then two accesses are made of the partition.

In operation there are two cases to consider. In the first case, a client makes a request that maps to exactly one partition in size and alignment. This case involves only one partition and some clients are dedicated to only one partition to simplify accesses for that client. In the second case, a client makes a request that spans two or more partitions. This requires that the request be split up and routed to two or more partitions for servicing of the request. The request can start at any partition. In the subcase of a write request, the write data are split and the write data and write request are routed to the various partitions. Once the write is retired in the arrays for the affected partitions, the write is completed. In the subcase of a read request, the read request is routed to the proper partitions and as the read request is completed by each of the affected partitions the read data is collected and returned to the client.

The partition data bus width and client data bus width may be different. A client with a wider data bus than that of the partition may consume several clocks of partition transfer time. Alternatively, a client with a data bus width that is smaller than that of a partition can request a burst having a size that requires only one clock cycle of the partition to access the data from that partition but requires many clock cycles to multiplex the partition's data onto the smaller client data bus. The read circuitry for the narrow client is configured to use several clocks to multiplex the data from the partition onto the narrow client bus. This ensures that unused data is not fetched, and isolates the low bandwidth client from the high bandwidth memory system.

FIG. 5A shows a block diagram for the address, command and write data path for the memory system of the present invention. For convenience, four memory partitions 26a, 26b, 26c, 26d are shown, but any number of partitions is contemplated for the present invention. Each partition has an arbiter, 56a, 56b, 56c, 56d, having an output that supplies requests to the partitions and a number of inputs, each of which connects to a client queue 62-66, 70-74, 78-82, 86-90. Each arbiter 56a-56d prioritizes the servicing of requests at its inputs according to a

priority policy and each client queue 62-66, 70-74, 78-82, 86-90 that is connected to an arbiter input receives a memory partition request derived from the one or more memory clients 100, 102, 104, such as the various graphics engines mentioned above. While the figure shows three clients, any number of memory clients is possible as long as the necessary hardware is provided for each client.

Priority policies for the arbiters 56a-56d include a least-recently used policy, a fixed priority policy or a round-robin policy or a static or dynamic set of policies depending on the type and nature of the client requests in the client queues. Requests for time critical processes such as display updates or other isochronous processes are given higher priority over requests that have less strict timing requirements.

Any number of clients can request memory operations of the partitions; three clients are shown for convenience. For each client, there is a router 110, 112, 114 that determines, based on an address and reference size contained in the client's request, the one or more partitions 26a-26d, that are needed to service the request. If, in the example shown, each partition 26a-26d, has an effective address map width of $W \times 8$ bits (W bytes) then the router 110-114 decodes a portion of the address in the request to determine which of the W -byte partitions should service the request. In addition to the decoding function of the router, the router, in some versions of the invention, also performs address mapping or address translation functions if they are required for a particular application. The router can also perform the function of breaking up a request that is so large it violates the no-wrap around rule. The router then issues requests to the client queues each of which meets the no-wrap rule.

Memory clients 100-104 can place a partition request into one of the client queues 62-66, 70-74, 78-82, 86-90 independently of any other client placing a partition request into a different queue. This prevents memory clients from blocking or interfering with each other at least insofar as memory operations are involved. This means that no partition waits on another partition before servicing a memory request. This arrangement improves memory system throughput for memory reads and writes that require fewer than an integer number of all of the partitions. For example, if there are four partitions, then requests requiring 1, 2, or 3 or 5, 6, or 7 partitions receive improved service. Requests that require an integer number of all four partitions incur no loss in performance in the partitioned memory system.

FIG. 5B shows one implementation of logic present in the router of FIG. 5A. The router passes through the request and its address and transfer size information and derives the starting partition information by means of a starting partition logic block 116. The starting partition and size are used by the router to determine which partition client queue to load with a request.

FIG. 5C shows another implementation of logic present in the router of FIG. 5A. In this case, the router passes through the request and its address and transfer size information and derives not only the starting partition information but also a sequence count by means of sequence counter 118. Sequence counter 118 is incremented for each new request as long as there is a not busy condition according to gate 119. The starting partition and size are used by the router to determine which partition client queue to load with a request.

FIG. 6A shows a block diagram for the read data path in accordance with one version of the present invention. In this case, the partition data bus width is the same as the client's data bus width. Read requests that touch only a single partition and burst read requests that span a number of partitions must be serviced by those partitions and the read data must be presented in the order requested by the client back to the client. To handle this case and to prevent deadlocks, the hardware of FIG. 6A is required for each client.

For a particular client, each partition in FIG. 6A has a read queue 120a-120d that captures the read data from the partition array 26a-26d. This read queue 120a-120d is controlled by a queue controller 122, 124, 126, 128 that is connected to the read queue 120a-120d, the partition 26a-26d, and to a control block 130. Each of the read queue controllers 122-128 receives a data_valid signal from the partition 26a-26d and provides a queue control signal, q_empty, to the control block 130. Each of the read queues 120a-120d connects to the input of a multiplexer 132 whose output provides the read data to the client to which this circuitry is dedicated. Another queue, called a side queue 134, receives information regarding the starting partition for the read request, sub request ID, and the burst size, if any, for the read request. Sub-requestors 153, 155, 157, in FIG. 7 require sub request IDs because such sub clients share a single request path. In FIG. 6A, control block 130 is connected to the multiplexer 132 to selectively couple one of the inputs to the output of the multiplexer as the data becomes available at the output of the read queue 120a-120d, respectively connected to each multiplexer input. The control block also provides signals to the queue controllers for use in controlling the queues and provides the data valid signals, data_valid_req0a, data_valid_req0b, data_valid_req0c, for each of the clients.

1 The hardware according to the block diagram of FIG. 6A, operates to collect the various
parts of read data that are supplied by the partitions 26a-26d in response to a read request. The
partition loads the read data into read queues corresponding to the client that issued the read by
using the data_valid signal as a load signal for the client read queue. For example, if the read
5 request starts at partition 1, 26b as determined by the data in the side queue 134 that is received
by the control block 130, then when the queue controller 122-128 for a partition 26a-26d
discovers that data is ready in the read queue for that partition by means of the q_empty signal
becoming false, the control block 130 sets the multiplexer 132 to output the read queue for
partition 1, 26b to the particular client. Next, the queue controller for partition 2, 26c is checked
10 to see if the data is ready from partition 2. If so, then the multiplexer 132 is set to output the read
queue for partition 2 to the client. This sequence continues until the full amount of data requested
by the client is sent to the client. If the data bus size of a partition is smaller than the range of
locations mapped to that partition then multiple read data of the partition may be returned until
the range of locations in the linear map for that partition is satisfied.

15 In some cases a memory client can accept data in an out-of-order fashion. This means
that instead of accepting data, lowest byte first for example, the client can accept data in a
number of other pre-specified orders. In these cases, the queue controllers 122-128 operate to
cause the queues 120a-d to output data in a non-first-in-first-out order in order to provide read
data in the particular order in which the clients is accepting the data. This increases throughput of
20 the memory system because a client that can receive data out-of-order can accept data as soon as
it is available from a partition.

The embodiment of FIG. 6H does not use a side queue, but instead provides each client
with a sequence number counter or equivalent mechanism, which increments for each reference
that is issued by the client. The sequence count is conveyed to all servicing partitions along with
25 start partition, transfer size and sub request ID if there are multiple clients sharing the same
router as shown in FIG. 7. The sequence count is passed through the partition and loaded into the
read queues 120a-d with the read data when that partition's read return data returns from
memory. The outputs of read queues 120a-d transfer this information to controller 130.
Controller 130 examines the partition read queue outputs and selects read data tagged with the
30 next sequence number only after exhausting read data tagged with the current sequence count.

FIG. 6B shows a block diagram for the read data path in accordance with one version of the present invention with partition-size interface hardware, which is needed when the data bus width of a client is different than that of the partition. The data bus width of a partition may be smaller than that of a client, such that the partition must be cycled more than once to obtain enough data to match the bus width of the client. In this case the control logic operates to cause a burst of data (several data words) to be produced from the partition. Interface hardware blocks 140, 142, 144, 146 for holding the burst data are additionally included in the multiplexer circuitry 133. The multiplexer circuitry selects one of the interface blocks to provide some or all of the burst data.

FIG. 6C shows an implementation of the interface hardware included in the multiplexer circuitry of FIG. 6B. This circuitry adapts a W wide partition to a client bus having a width of $2W$. A register 150 and multiplexer 152 capture and hold a portion of the burst data and the remaining portion of the burst data is provided by the associated read queue. In other embodiments, both W -wide paths are provided by registers.

FIG. 6D shows another implementation of the interface hardware included in the multiplexer circuitry of FIG. 6B. In this implementation, the partition bus is W bytes wide and the client bus is $\frac{1}{2} W$ wide. A multiplexer 152 adapts the wider bus to the smaller bus.

FIG. 6E shows another block diagram for the read data path in accordance with another version of the present invention with partition-size interface hardware. In this case, the client bus width is larger than the partition address map size. In this example, there are two interfacing blocks included within the multiplexer circuitry 133. The first interface block 141 is connected to receive data from read queues 120a and 120b and the second interface block 143 is connected to receive data from read queues 120c and 120d.

FIG. 6F shows an implementation of the interface hardware included in block 143 P of the multiplexer circuitry of FIG. 6E. The interface hardware simply passes through the two W -byte sized busses to provide a bus that is $2W$, because the outputs of a pair of read queues are available to the multiplexer circuitry.

FIG. 6G shows another implementation of the interface hardware included in the multiplexer circuitry of FIG. 6E. The interface block shown adapts a partition bus having a width W and address map width $2W$ to a client bus that has a width $4W$. A pair of registers, 154a,

154b, and a pair of multiplexers, 156a, 156b, are used to capture multiple data items from the pair of read queues to which each of the interface block, 141, 143 is connected.

FIG. 7 shows an alternative embodiment of the command and write data path. In this embodiment, an arbiter 151 is added to prioritize a number of sub-requestors 153, 155, 157 that share a command and write data path in order to reduce the hardware that would otherwise be needed for each requester. Each sub-requestor has a sub-request ID. The data_valid signals of FIGs. 6A and 6B and the sub-request ID indicate which of sub-requestors 153, 155, 157 should collect the read data.

FIG. 8 shows another alternative embodiment of the command and write path in which the arbitration for access to a partition is in two parts, arbiter-0a 56a-56d, and secondary arbiter-0b 160-166, and there is a preferential path for a high priority requester 106, which, in the figure, is Req3. Low priority requesters arbitrate to gain access to the partitions using first the arbiter-0a and then secondary arbiter-0b circuitry but the high priority request via client queues 60, 68, 76, 84 arbitrates to gain access using only the arbiter-0b circuitry 160-166. It is also advantageous to introduce a refresh requestor 170 as shown and memory device initialization requests into the arbiter-0b 160-166 blocks.

The above describes the cases in which a (i) processing request is sent to a client, (ii) the client performs the requested processing and makes memory requests and (iii) the memory system routes the memory requests to the proper client queues. However, if a memory client is itself partitioned into an number of processing stages, an alternative is (i) to determine the one or more processing stages required for a processing request, (ii) route the processing requests to the proper stage for processing and then (iii) send the request directly to the appropriate client queue which is connected to a specific partition. A single memory client that is not partitioned into stages may also be restricted to only access data in a single partition and connect directly only to that partition. FIG. 9 shows this alternative embodiment of the command and write path in which there is no router for client 3 106 because the client directs its requests via client queue 84 only to a particular partition, partition 3, 26d. For these partitioned clients, such as a raster-operation pipeline, this simplifies and speeds up the access to the memory subsystem. In addition, the read path is simplified because the read data is directly returned to the requester from the dedicated partition. The multiplexer and control circuitry of FIG. 5 is not required for a requester that is dedicated to a particular partition.

One or more of the above-described embodiments can be combined according to the embodiments that are needed for the types and number of memory clients and all such combinations are within the spirit and scope of the present invention.

FIG. 10 shows a plot illustrating the improved fetching efficiency of the present invention. For the same small triangle size, between approximately 10 and 100 pixels there is a marked improvement in the efficiency.

Although the present invention has been described in considerable detail with reference to certain preferred versions thereof, other versions are possible. Therefore, the spirit and scope of the appended claims should not be limited to the description of the preferred versions contained herein.

CLAIMS

What is claimed is:

1. A method of servicing memory requests from at least one memory client, said requests being
5 directed to a memory subsystem having a plurality of independently operable partitions,
comprising:

receiving at least one memory request from said at least one client, said memory request
including information specifying a location of requested data in the memory subsystem and a
data transfer size for said request;

10 determining one or more partitions needed to service said request based on the specified
location and transfer size;

routing said request to each of the one or more servicing partitions; and

servicing the routed request at each servicing partition independently of the other
servicing partitions.

2. A method of servicing memory requests from a plurality of memory clients, said requests
being directed to a memory subsystem having a plurality of independently operable partitions
each with a queue for each of the memory clients, comprising:

receiving a plurality of memory requests from the plurality of clients, each of said
20 memory request including information specifying a location of requested data in the memory
subsystem and a data transfer size for said request;

determining for each request, independently of the other requests, one or more partitions
needed to service said request based on the specified location and transfer size;

25 routing to and storing, independently of the other requests, each of said requests in the
client queues of the one or more servicing partitions;

selecting, at each of the servicing partitions and independently of other servicing
partitions, based on a priority policy, a request from one of the client queues for servicing; and

servicing a request at each servicing partition independently of the other servicing
partitions.

3. A method of servicing memory requests from a plurality of memory clients as recited in claim 2, wherein the priority policy is a static policy.
4. A method of servicing memory requests from a plurality of memory clients as recited in claim 3, wherein the static policy is a least recently used policy.
5. A method of servicing memory requests from a plurality of memory clients as recited in claim 3, wherein the static policy is a round-robin policy.
6. A method of servicing memory requests from a plurality of memory clients as recited in claim 3, wherein the static policy is a fixed priority policy.
7. A method of servicing memory requests from a plurality of memory clients as recited in claim 2, wherein the priority policy is a dynamic policy.
8. A method of servicing memory requests from a plurality of memory clients as recited in claim 7, wherein the dynamic policy is one that is selected from the group consisting of a round-robin policy, a fixed priority policy, and a least recently used policy.
9. A method of servicing memory requests from a plurality of memory clients as recited in claim 2, wherein the step of routing to and storing, independently of the other requests, each of said requests in the client queues of the one or more servicing partitions includes performing an address translation of the location specified in said request.
10. A method of servicing memory requests from a plurality of memory clients as recited in claim 2,
- further comprising the step of, prior to determining the one or more partitions for each request, selecting one of said requests from a subset of the plurality of clients based on a priority policy; and
- wherein the step of determining the one or more partitions for each request includes determining the one or more partitions for the prioritized request.

11. A method of servicing memory requests from a plurality of memory clients as recited in claim 2,

wherein one of the memory clients makes high priority requests; and

further comprising the step of, subsequent to selecting a request from one of the client queues for servicing, selecting one of the selected requests and the high priority requests for servicing by a partition.

12. A method of servicing memory requests from a plurality of memory clients as recited in claim 2,

further comprising the step of, prior to determining the one or more partitions for each request, selecting one of said requests from a subset of the plurality of clients based on a priority policy, wherein each client in the subset has a sub-request ID;

wherein the step of routing to and storing each of the requests in the client queues of the one or more servicing partitions includes storing, in the client queue, the sub-request ID along with the selected request of the subset, the selected request being a read request; and

wherein the step of servicing the read request at each of the servicing partitions includes:

enqueueing the sub-request ID together with the read data from the servicing partitions; and

routing the read data to the selected client in the subset based on the enqueued sub-request ID.

13. A method of servicing memory requests from a plurality of memory clients as recited in claim 2,

further comprising the steps of, prior to determining the one or more partitions for each request, selecting one of said requests from a subset of the plurality of clients based on a priority policy, wherein each client in the subset has a sub-request ID;

wherein the step of routing to and storing each of the requests in the client queues of the one or more servicing partitions includes storing, in the client queue, the sub-request ID along with the selected request of the subset, the selected request being a read request; and

wherein the step of servicing the read request at each of the servicing partitions includes:

enqueuing the sub-request ID separately from the read data for the selected client in the subset; and

routing the read data to the selected client in the subset based on the enqueued sub-request ID.

5

14. A method of servicing memory requests from a plurality of memory clients as recited in claim 2,

wherein at least one of the memory clients is a client that makes requests only to a single partition; and

10

wherein the step of routing to and storing, independently of the other requests, each of said requests in the client queues of the one or more servicing partitions includes routing to and storing the single-partition requests in the client queue of the single partition.

15. A method of servicing memory requests from a plurality of memory clients as recited in claim 2,

wherein one of the memory requests is a read request; and

wherein the step of servicing a request includes:

determining when a partition servicing the read request has obtained said requested data; and

20

transferring said requested data from the partition to the memory client.

16. A method of servicing memory requests from a plurality of memory clients as recited in claim 15,

25

wherein the step of routing to and storing each of the requests in the client queues of the one or more servicing partitions includes appending to the selected read request, sequence count, starting partition, and transfer size information;

30

wherein the step of servicing a request further includes subsequent to determining when a partition servicing the read request has obtained said requested data, appending to said requested data, sequence count, starting partition, and transfer size information obtained from the selected read request; and

wherein the step of transferring said requested data from the partition to the memory client includes accessing the appended sequence count, the starting partition, and the transfer size information to determine when said requested data is available to be sent to the client.

17. A memory system for servicing memory requests from a plurality of memory clients, comprising:

a plurality of memory partitions each operable to service a memory request independently of other memory partitions, the memory request including information specifying a location of requested data in the memory subsystem and a data transfer size for said request;

a plurality of client queues, one for each memory client and each partition;

a plurality of routing circuits, one routing circuit connected to each memory client and to the client queues, each routing circuit operative to determine for each request, independently of the other requests, one or more partitions needed to service said request based on the specified location and transfer size, each routing circuit operative to route and store, independently of the other requests, each of said requests in the client queues of the one or more servicing partitions; and

a plurality of arbiter circuits, one arbiter circuit connected to each partition queue and to the client queues for the partition, each arbiter circuit operative to select, independently of other servicing partitions, based on a priority policy, a request for servicing from one of the client queues for the partition, and to transfer each of the selected requests, independently of the other selected requests, to the partition for each of the one or more servicing partitions.

18. A memory system for servicing memory requests from a plurality of memory clients as recited in claim 17,

wherein one of said memory requests is a memory read request that requires one or more partitions to provide read data that makes up the read request;

wherein each partition in the memory subsystem provides a data valid signal that indicates when read data is available from the partition; and

further comprising:

a plurality of read queues, one connected to each partition to receive and store said requested read data that is provided by the partition;

a plurality of queue controllers, each connected to one of the partitions to receive the data valid signal and to one of the read queues to control the read queue, each queue controller producing an indicator of the state of each read queue;

a side queue that holds data indicating the starting partition and the number of partitions providing read data for the reference;

multiplexer circuitry having a plurality of inputs, each connected to one of the read queues, the multiplexer circuitry operative to select one of the read queues for output to a particular memory client in response to at least one multiplexer selection control line; and

a control circuit connected to the side queue to receive data from the side queue, to each of the plurality of queue controllers to receive the status indicators, and to said at least one multiplexer selection control line, the control circuit using said selection control line to select, in response to a status indicator from a queue controller and the data in the side queue, the queue for output to the particular client, starting with the queue for the partition indicated by the side queue.

19. A memory system for servicing memory requests from a plurality of memory clients as recited in claim 17,

wherein one of said memory requests is a memory read request that requires one or more partitions to provide read data for said read request;

further comprising a sequence counter for each memory client, the sequence counter operative to increment a sequence count for each request made by the client to provide a tag for tracking each said read request;

wherein each partition in the memory subsystem provides a data valid signal that indicates when read data is available from the partition and makes available said sequence count, and data indicating the starting partition and the number of partitions providing read data for the reference with data valid signal and read data from the partition;

wherein each routing circuit provides a starting partition and burst size information for said read request; and

further comprising:

a plurality of read queues, one connected to each partition to receive and store the requested read data that is provided by the partition for said read request and to store with the requested read data the sequence count, the starting partition and burst size for said read request;

a plurality of queue controllers, each connected to one of the partitions to receive the data valid signal and to one of the read queues to control the read queue, each queue controller producing an indicator of the state of each read queue;

multiplexer circuitry having a plurality of inputs, each connected to one of the read queues, the multiplexer circuitry operative to select one or more of the read queues for output to a particular memory client in response to at least one selection control line; and

a control circuit connected to the read queues to receive control data, including said sequence count, data indicating starting partition and number of partitions providing read data for the reference, from the read queues, to each of the plurality of queue controllers to receive the status indicators, and to said at least one selection control line, the control circuit using said selection control line to select, in response to a status indicator from a queue controller and the sequence count, starting partition and burst size in the read queues, the queue for output to the particular client, starting with the queue for the partition indicated by the read queues.

20. A memory system for servicing memory requests from a plurality of memory clients as recited in claim 18,

wherein a client accepts data in an order that is non-sequential; and

wherein the read queue controllers control the read queues to produce data in a non-fifo order to provide read data in the order in which a client accepts the read data.

21. A memory system for servicing memory requests from a plurality of memory clients as recited in claim 18,

wherein one of the side queue and read queue contains information indicating that a burst of read data is required of each servicing partition; and

wherein the multiplexer circuitry includes:

an output multiplexer for transferring read data to the client; and

a plurality of burst registers each connected to one of the read queues and the control circuit, for holding some or all of the burst data in response to the control circuit, wherein the multiplexer circuitry is operative to additionally select one of the burst registers to transfer read data to the output multiplexer.

5

22. A memory system for servicing memory requests from a plurality of memory clients as recited in claim 18,

wherein there is one partition that services the read request, the servicing partition has a data bus with a particular width for carrying the partition data;

10

wherein the transfer size specified in the request is smaller than the width of the databus of the servicing partition; and

wherein the multiplexer circuitry includes:

an output multiplexer for transferring read data to the client; and

15

a plurality of interfacing multiplexers, each connected to one of the read queues and the control circuit, wherein each interfacing multiplexer is operative to sequentially select a first portion and second portion of the databus to send data to the output multiplexer.

20

23. A memory system for servicing memory requests from a plurality of memory clients as recited in claim 17, wherein the priority policy is a static policy.

24. A memory system for servicing memory requests from a plurality of memory clients as recited in claim 23, wherein the priority policy is a least recently used policy.

25

25. A memory system for servicing memory requests from a plurality of memory clients as recited in claim 23, wherein the priority policy is a round-robin policy.

26. A memory system for servicing memory requests from a plurality of memory clients as recited in claim 23, wherein the static policy is a fixed priority policy.

30

27. A memory system for servicing memory requests from a plurality of memory clients as recited in claim 17, wherein the priority policy is a dynamic policy.

28. A memory system for servicing memory requests from a plurality of memory clients as recited in claim 17, wherein the routing circuits perform an address translation of the location specified in said request.

5

29. A memory system for servicing memory requests from a plurality of memory clients as recited in claim 17, further comprising another arbiter that connects to at least one routing circuit to select one of said requests from a subset of the plurality of clients based on a priority policy and to forward that request to the routing circuit.

10

30. A memory system for servicing memory requests from a plurality of memory clients as recited in claim 17,

wherein one of the memory clients makes high priority requests; and

further comprising a plurality of secondary arbiters, each connected to the client queue having the high priority request and the arbiter for each of the partitions to select one of the selected requests and the high priority requests for storage in the partition queue of each partition.

15

31. A memory system for servicing memory requests from a plurality of memory clients as recited in claim 17,

wherein at least one of the memory clients is a client that makes requests only to a single partition; and


wherein the routing circuit routes the single-partition request to the client queue of the single partition.

20

25

ABSTRACT OF THE DISCLOSURE

A memory system having a number of partitions each operative to independently service memory requests from a plurality of memory clients while maintaining the appearance to the memory client of a single partition memory subsystem. The memory request specifies a location in the memory system and a transfer size. A partition receives input from an arbiter circuit which, in turn, receives input from a number of client queues for the partition. The arbiter circuit selects a client queue based on a priority policy such as round robin or least recently used or a static or dynamic policy. A router receives a memory request, determines the one or more partitions needed to service the request and stores the request in the client queues for the servicing partitions. In one embodiment, an additional arbiter circuit selects memory requests from one of a subset of the memory clients and forwards the requests to a routing circuit, thereby providing a way for the subset of memory clients to share the client queues and routing circuit. Alternatively, a memory client can make requests directed to a particular partition in which case no routing circuit is required. For a read request that requires more than one partition to service, the memory system must collect the read data from read queues for the various partitions and deliver the collected data back to the proper client. Read queues can provide data in non-fifo order to satisfy an memory client that can receive data out-of-order.

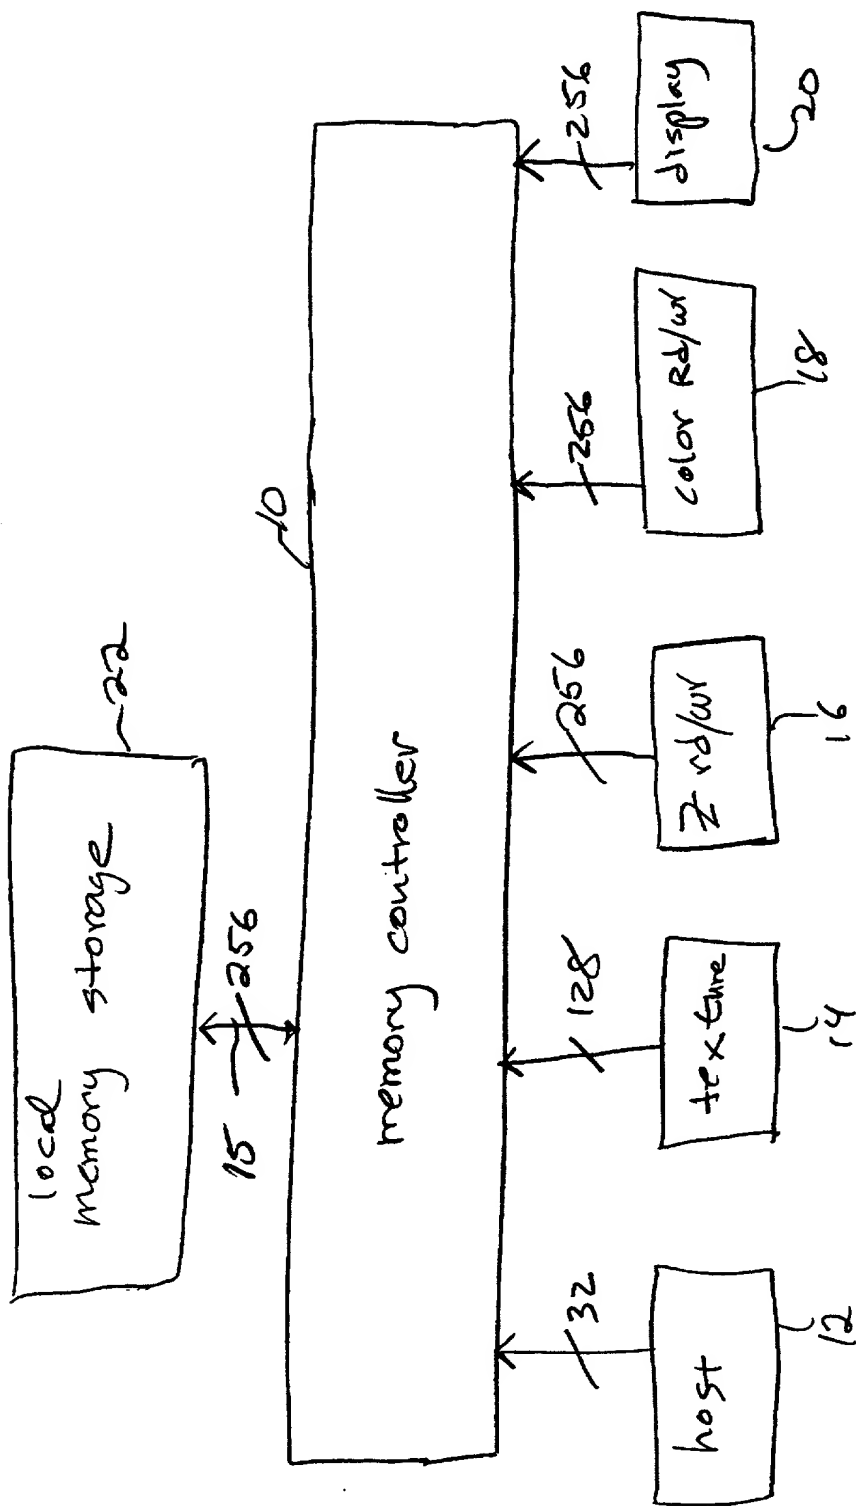[illegible]

(Prior Art)

F/G.1

	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

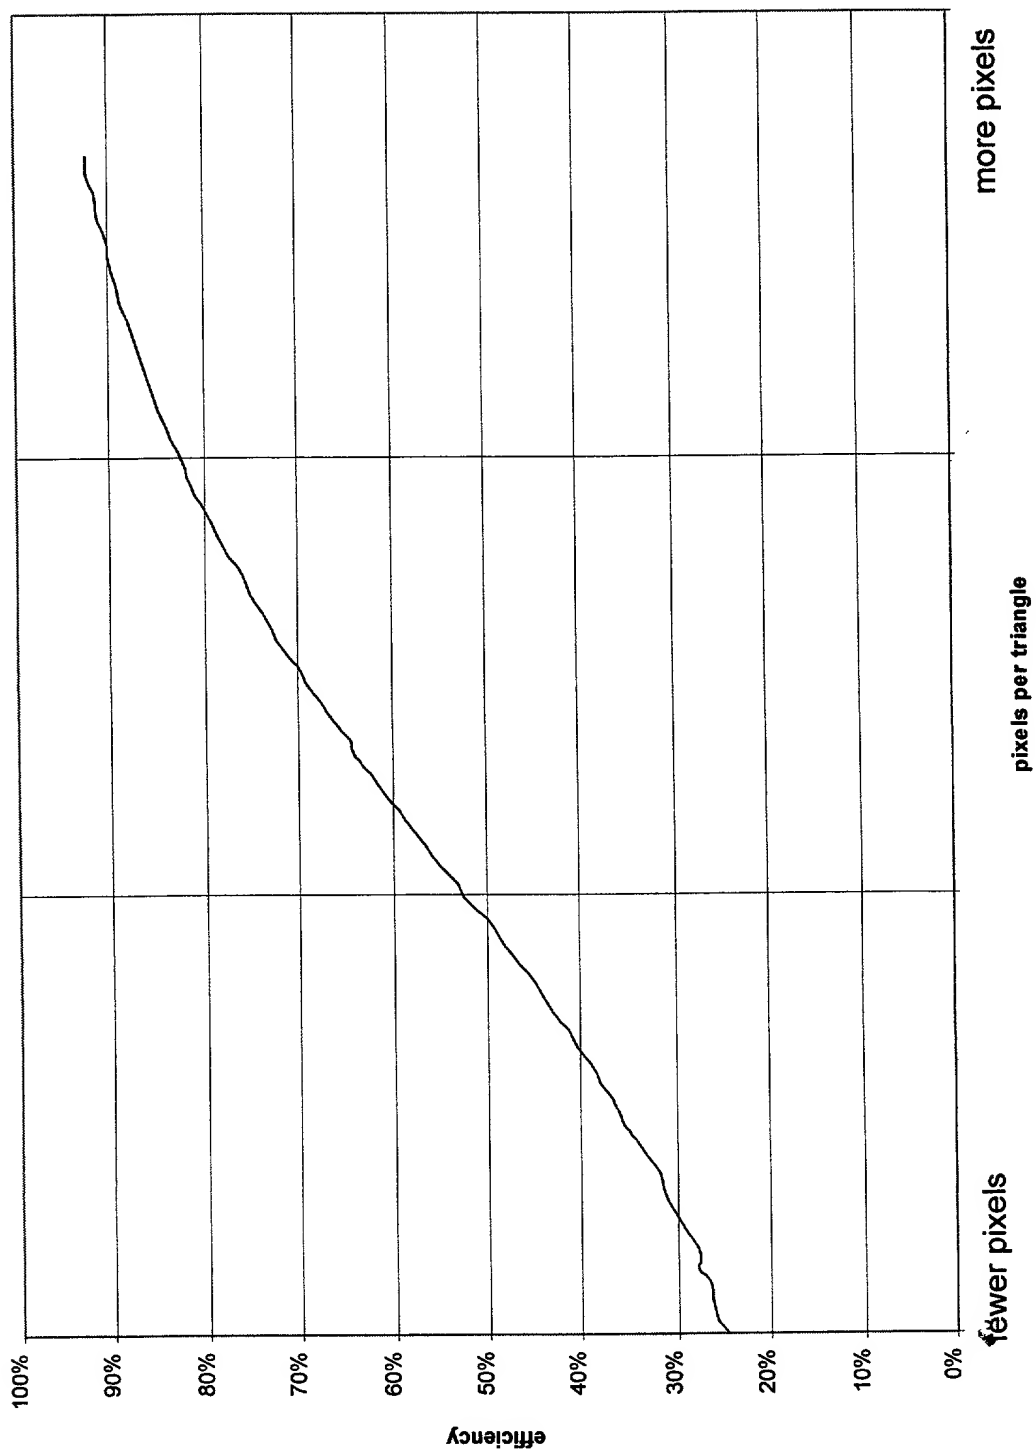


Fig. 2

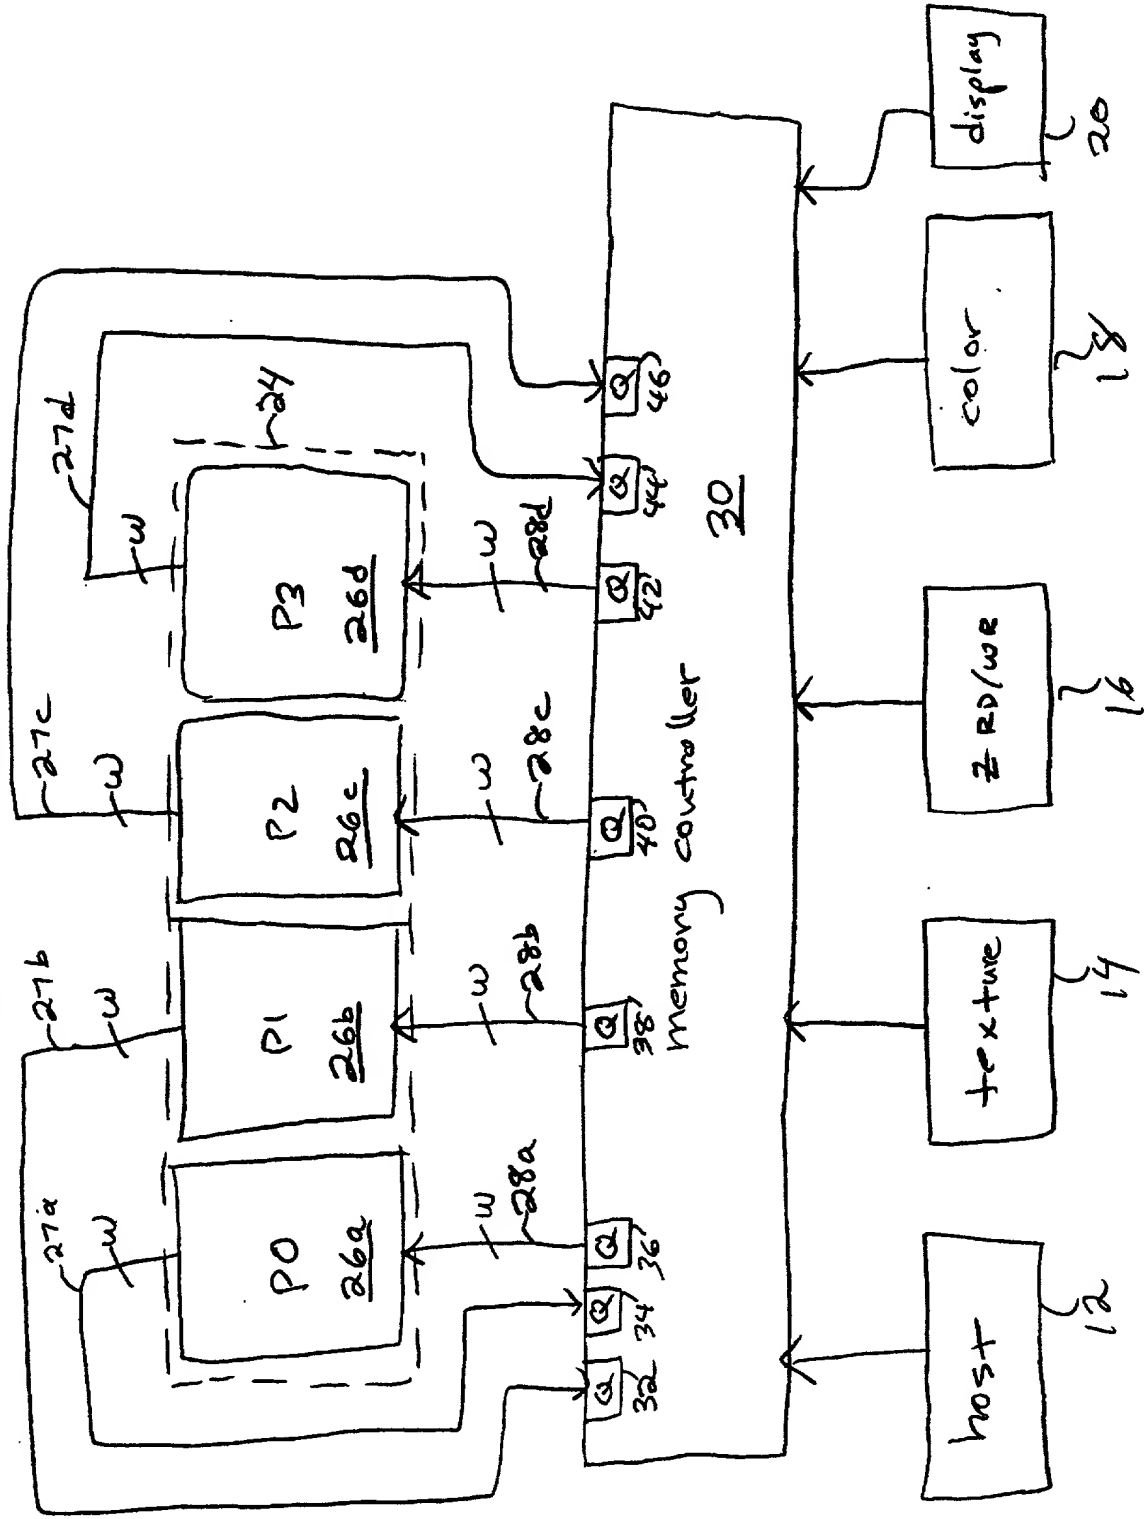


FIG. 3

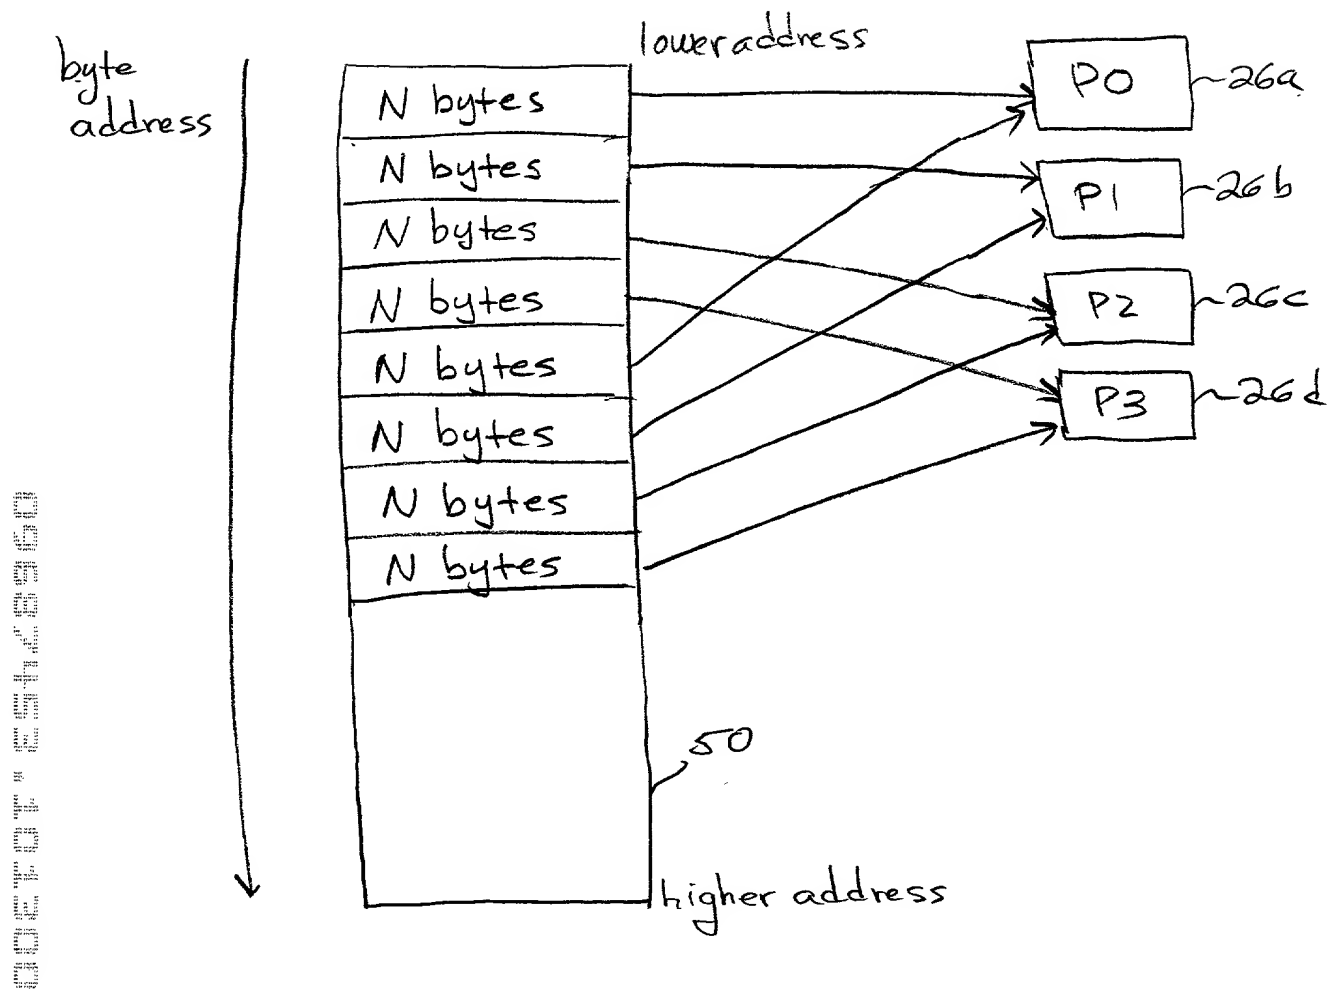


FIG. 4

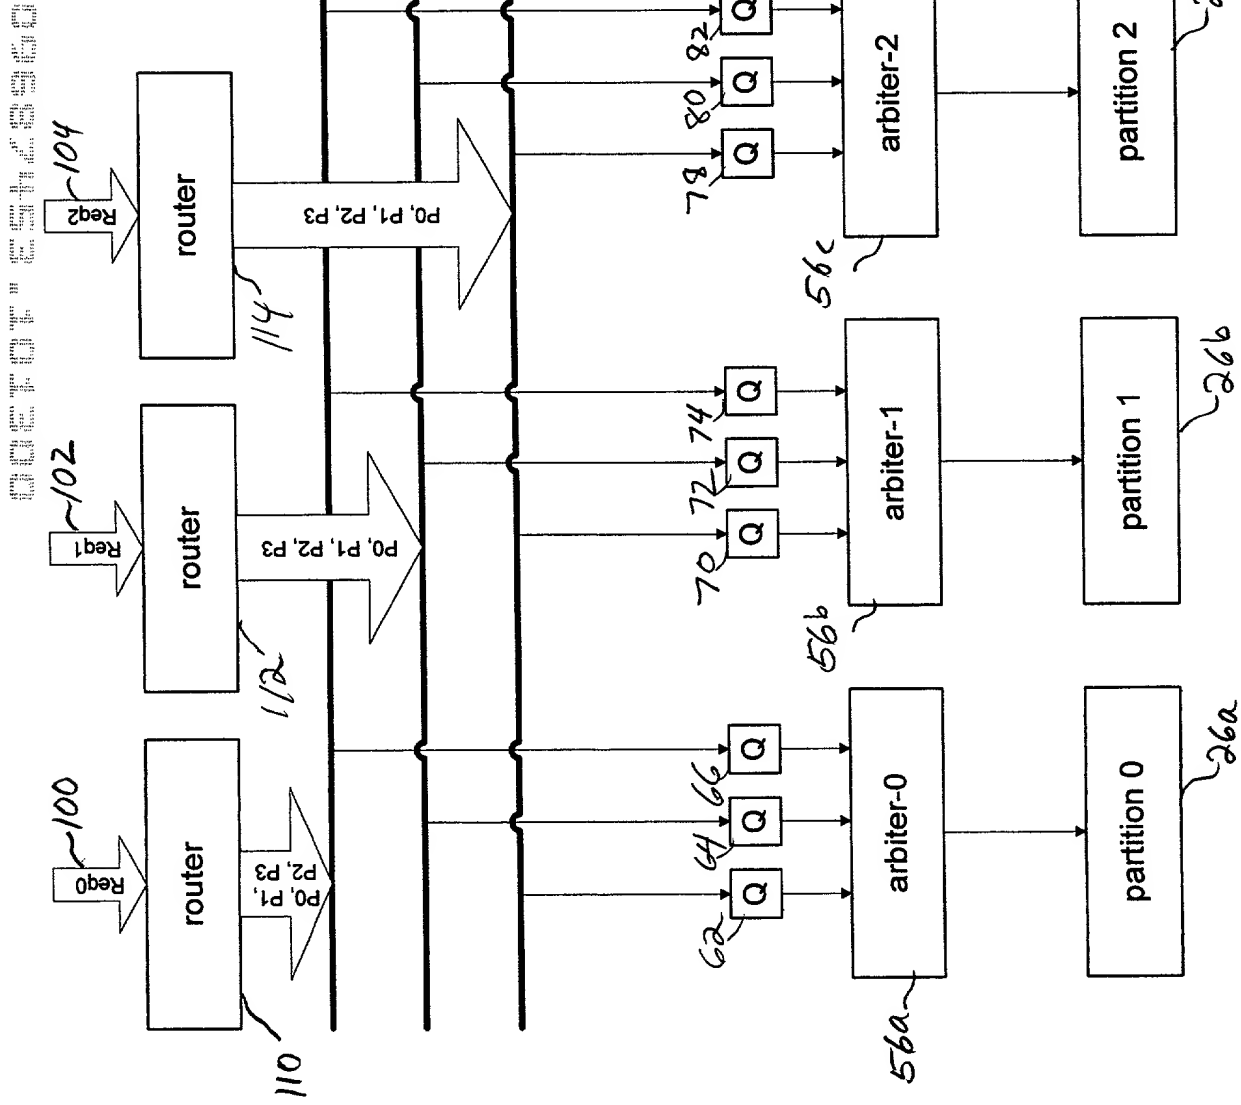


FIG. 5A

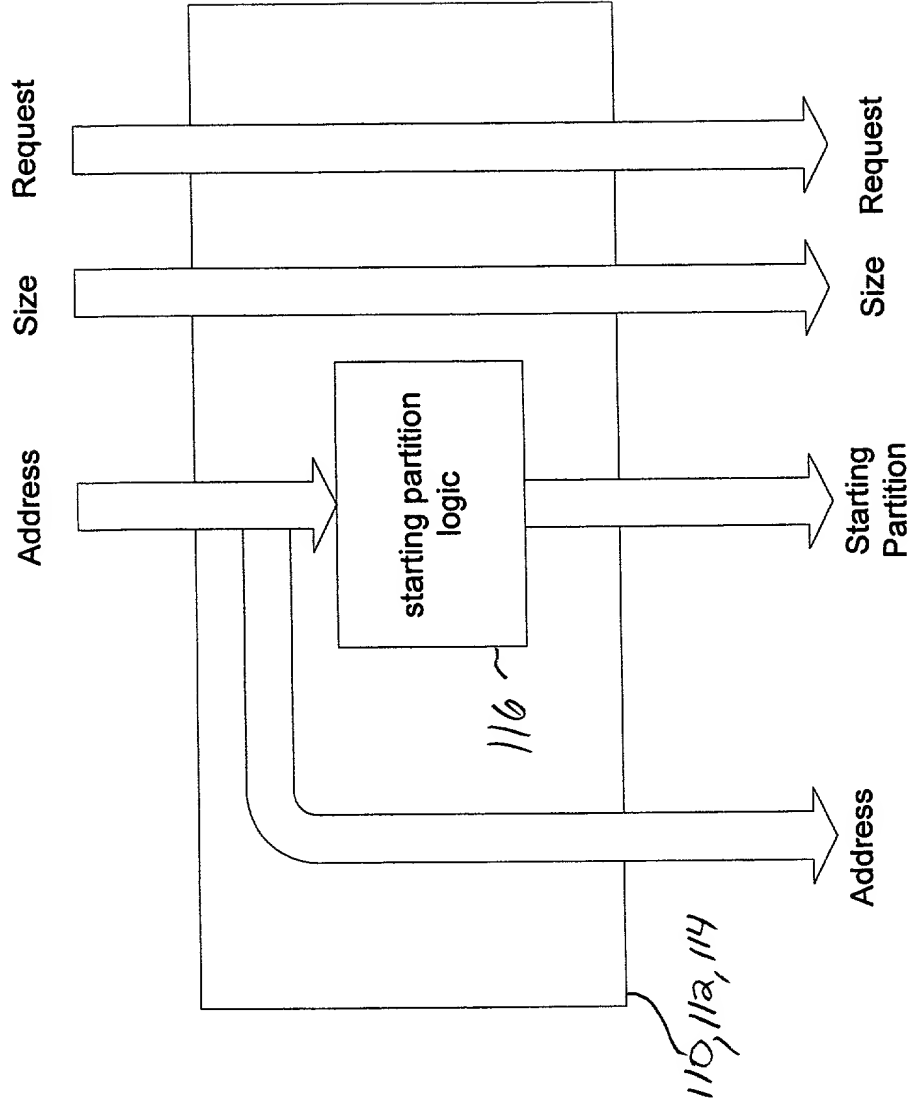


FIG. 5B

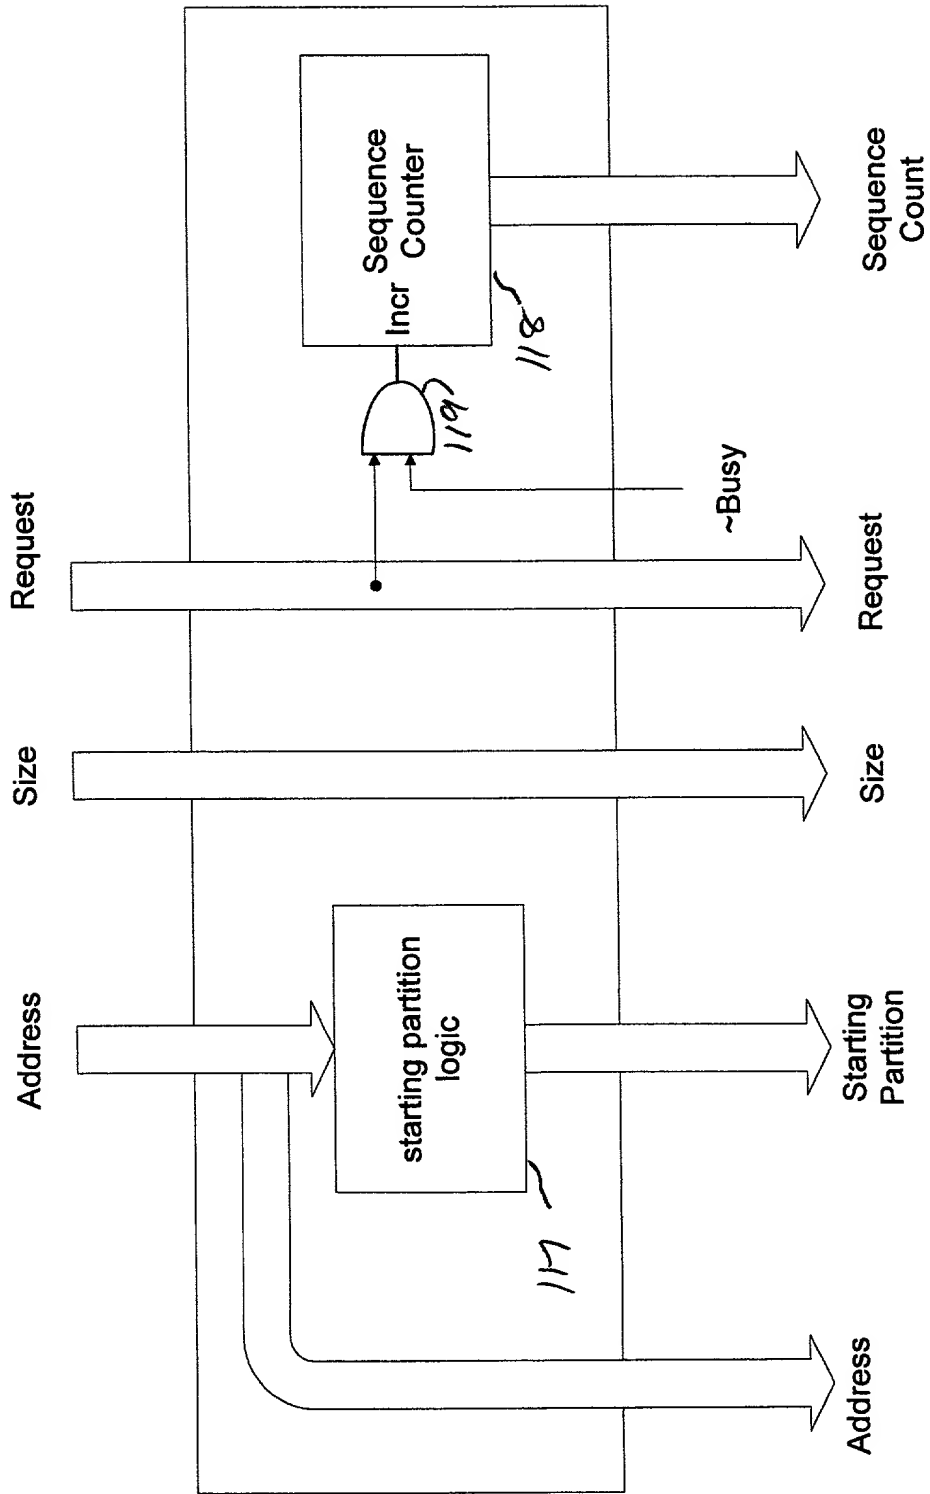


FIG. 5C

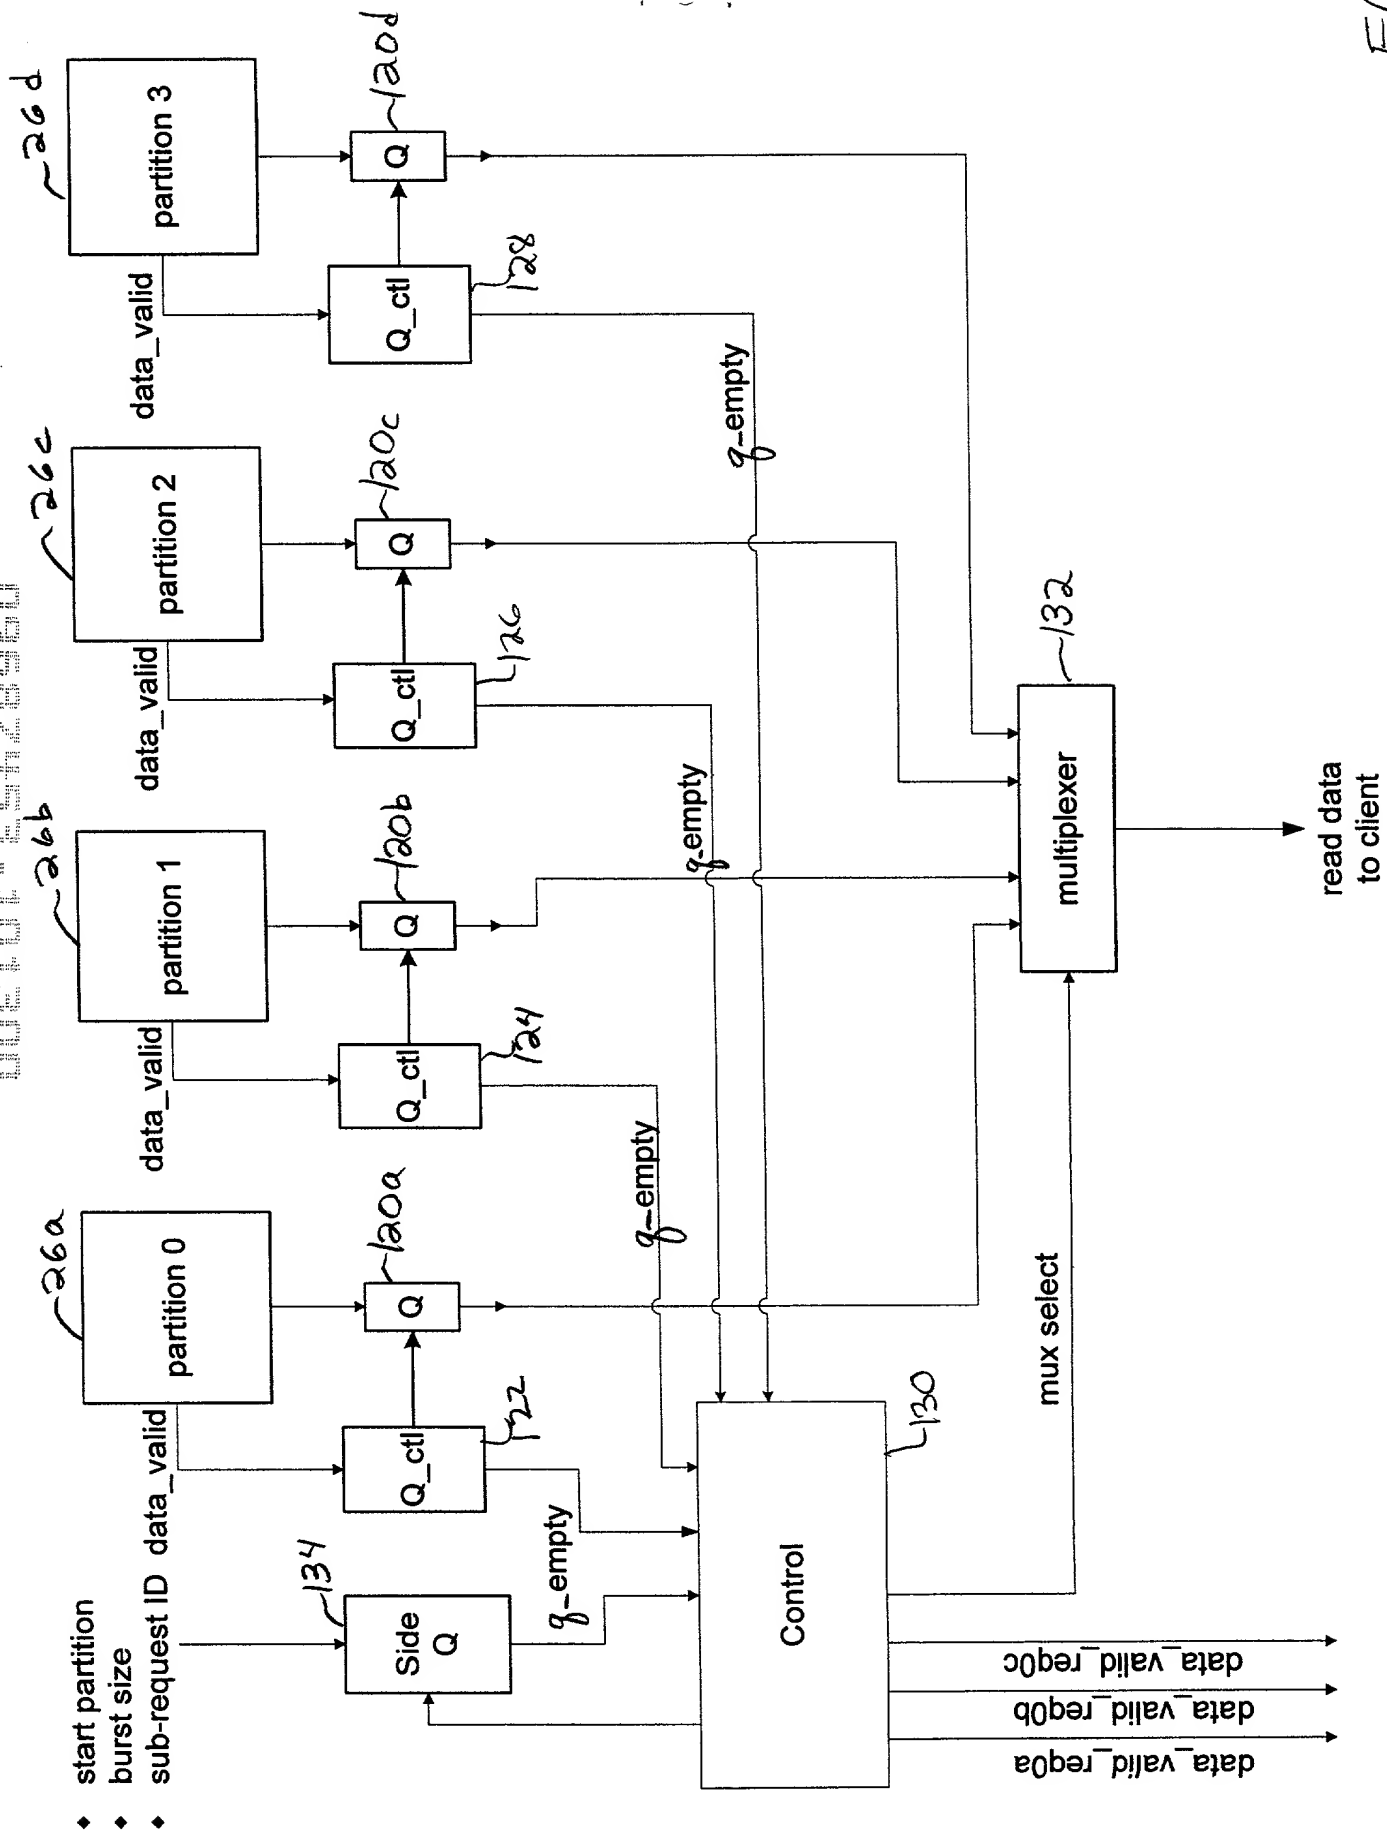


FIG. 6A

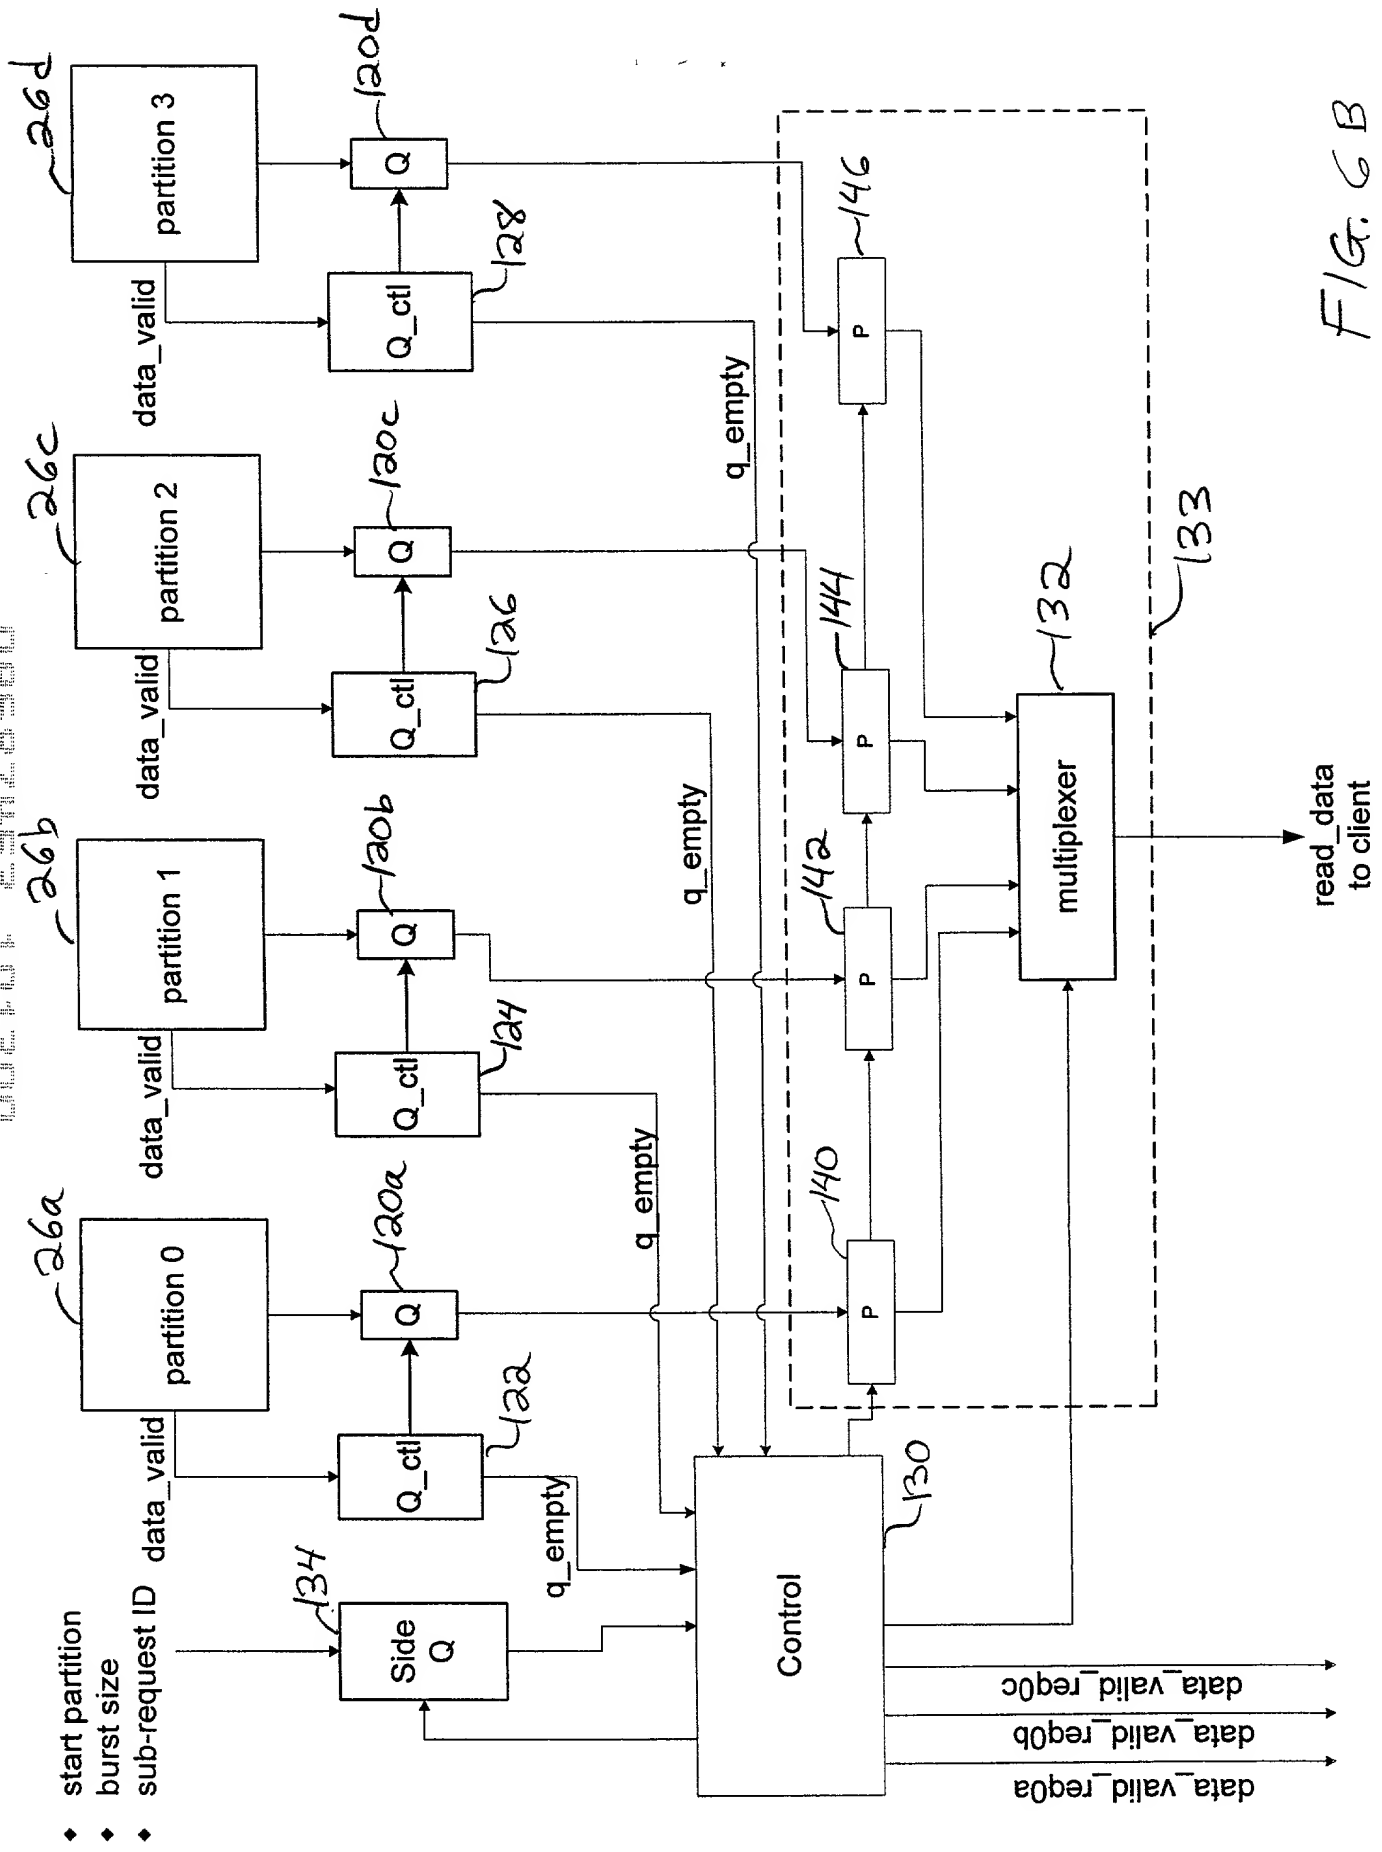


FIG. 6B

FIG. 6C

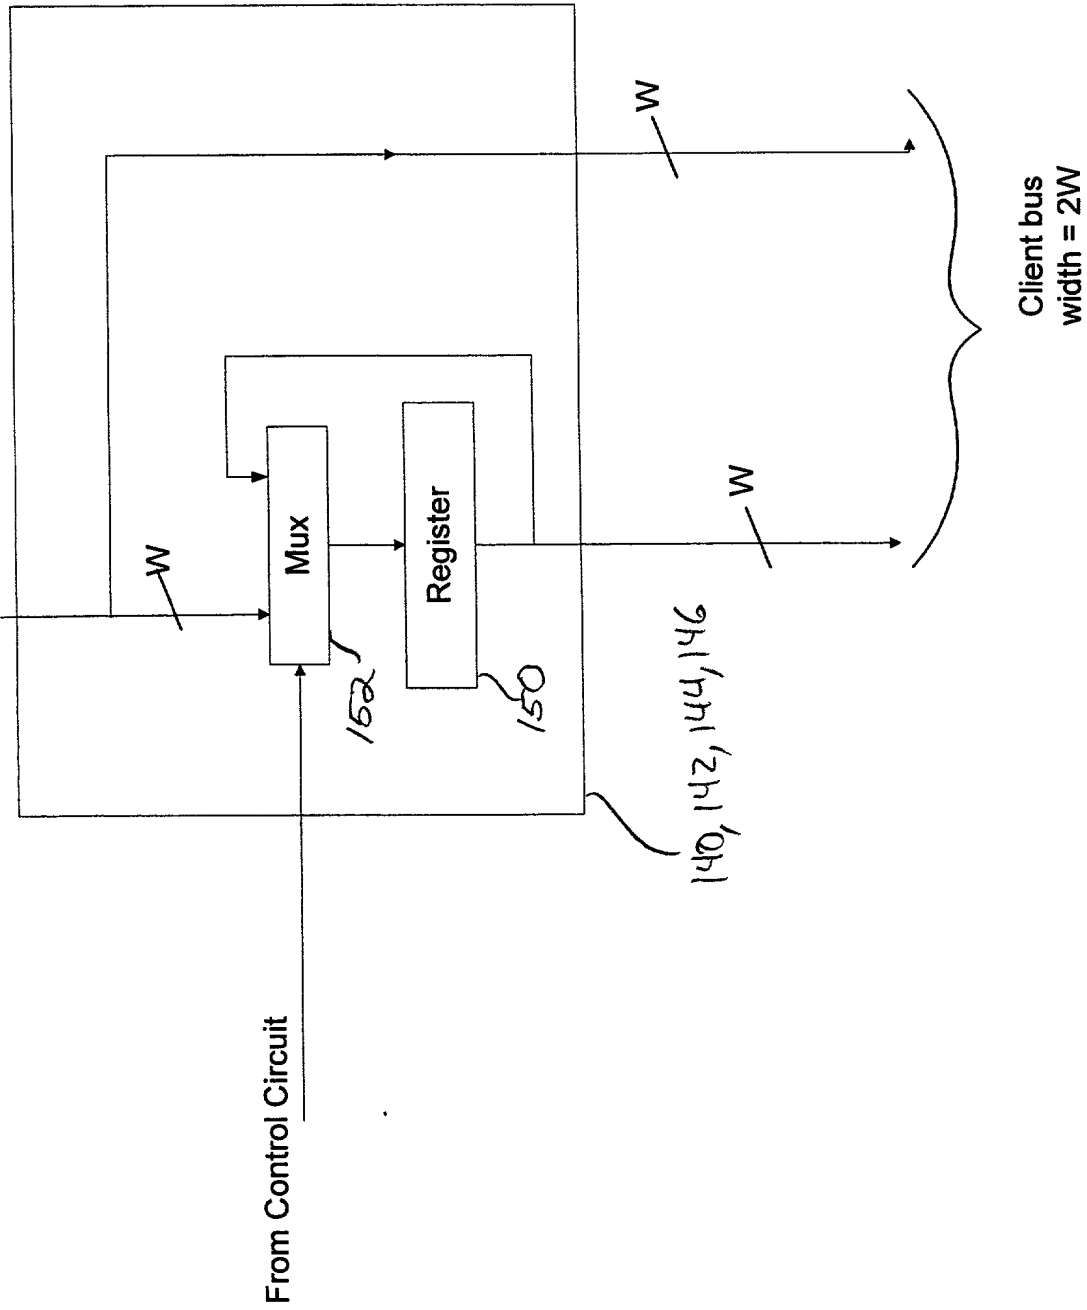


FIG. 6C

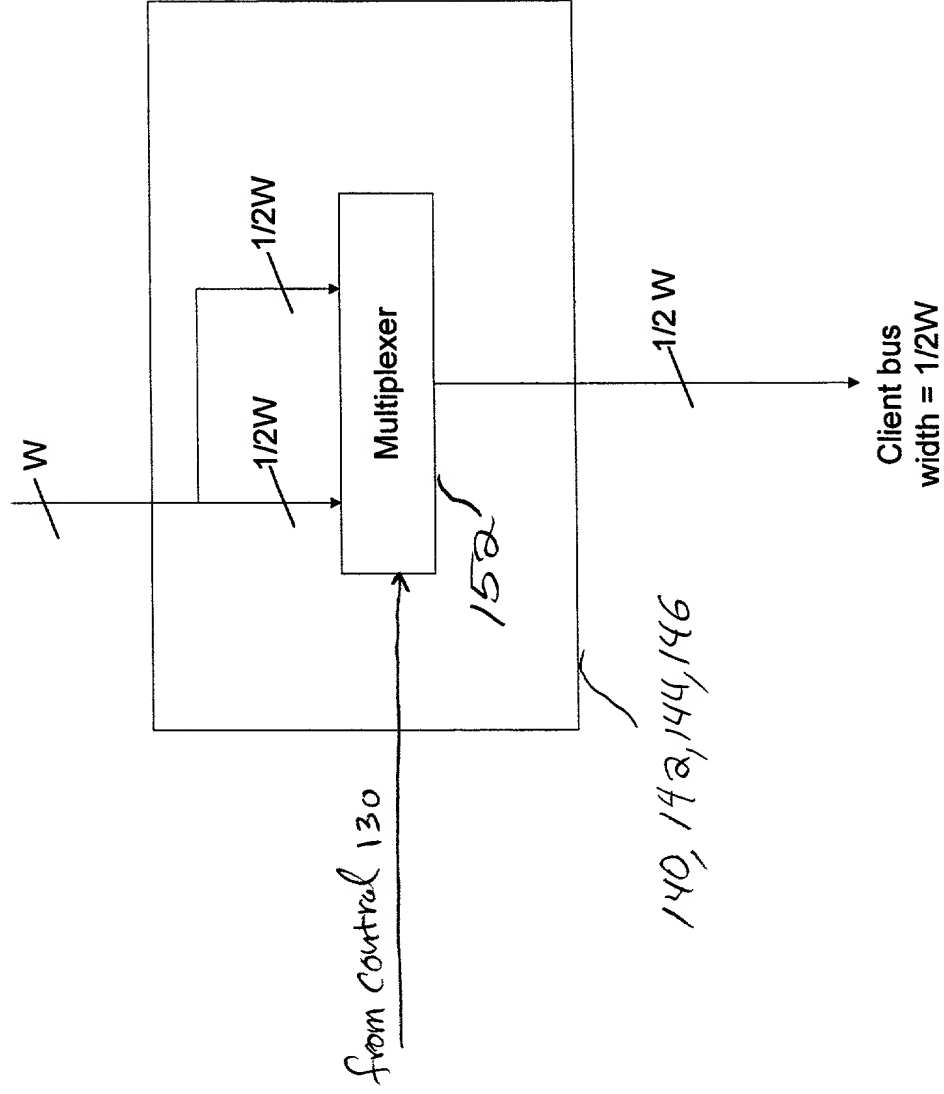


FIG. 6D

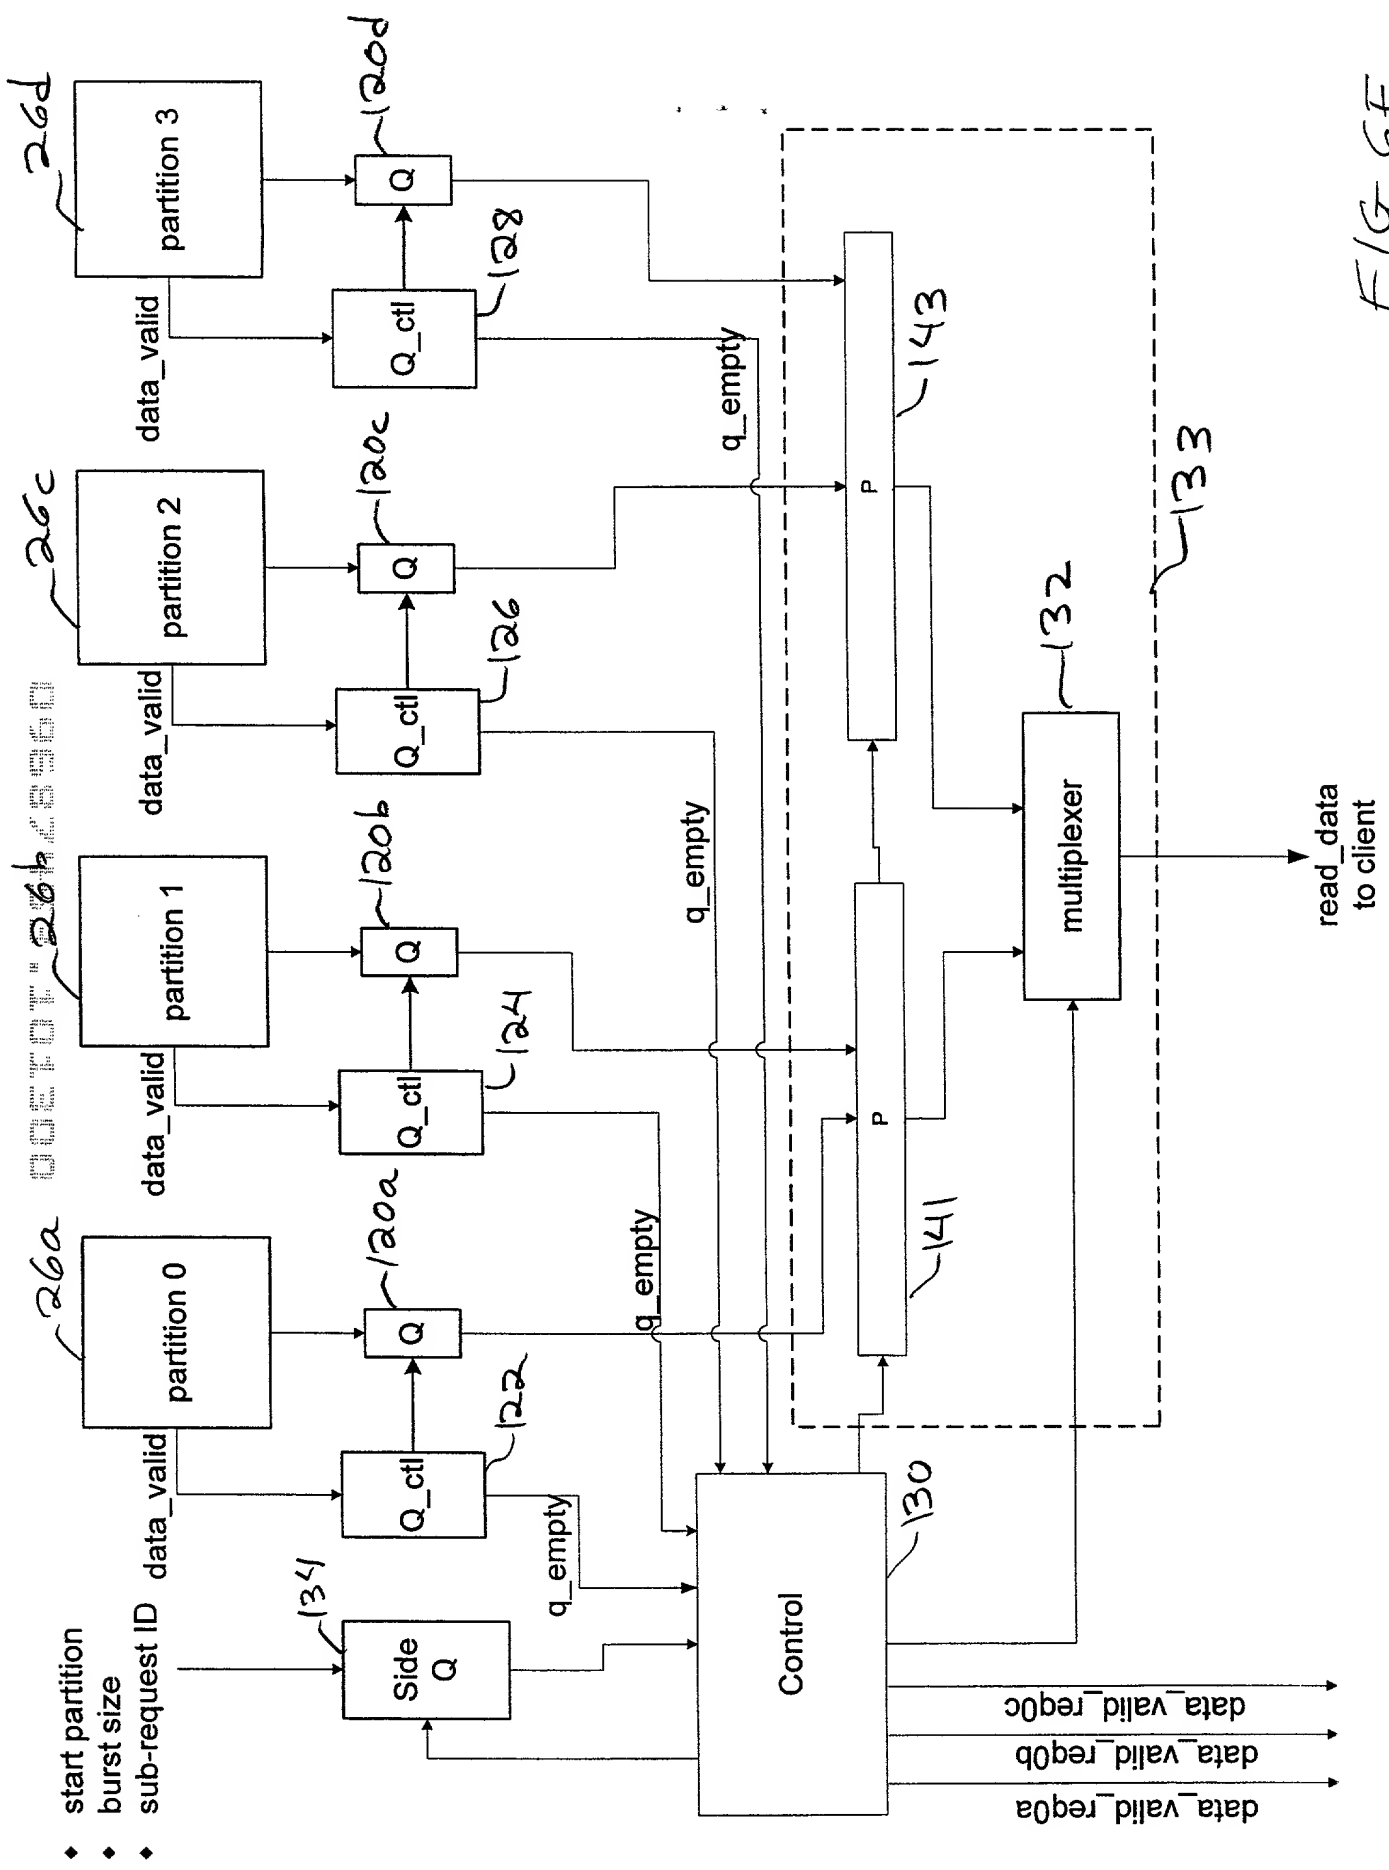


FIG. 6F

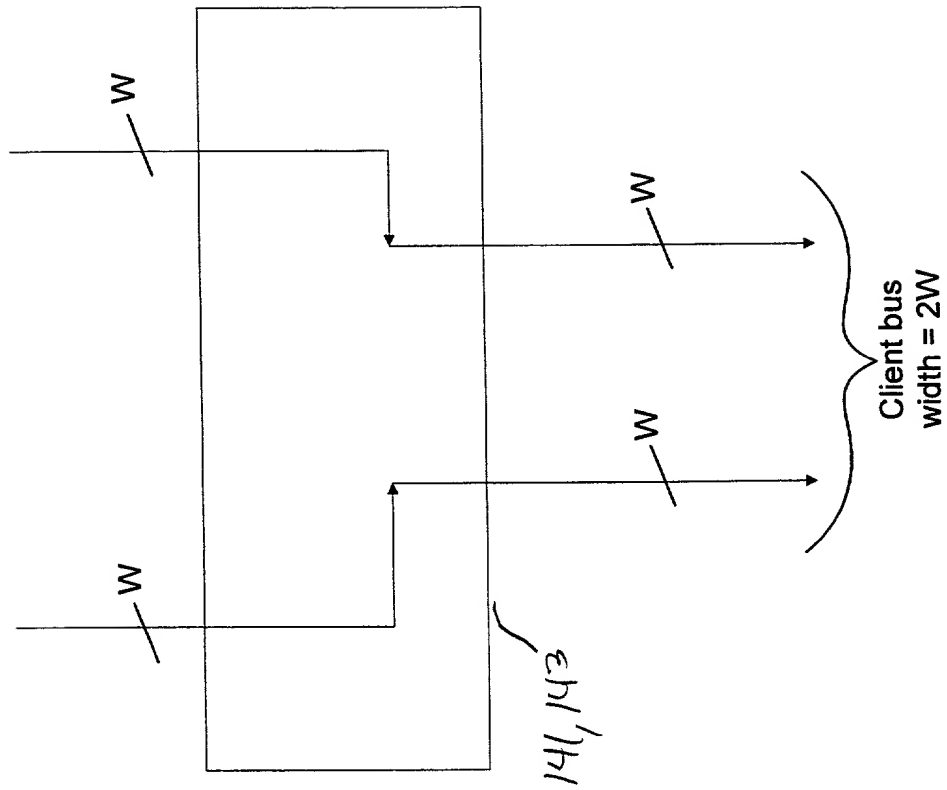


FIG. 6F

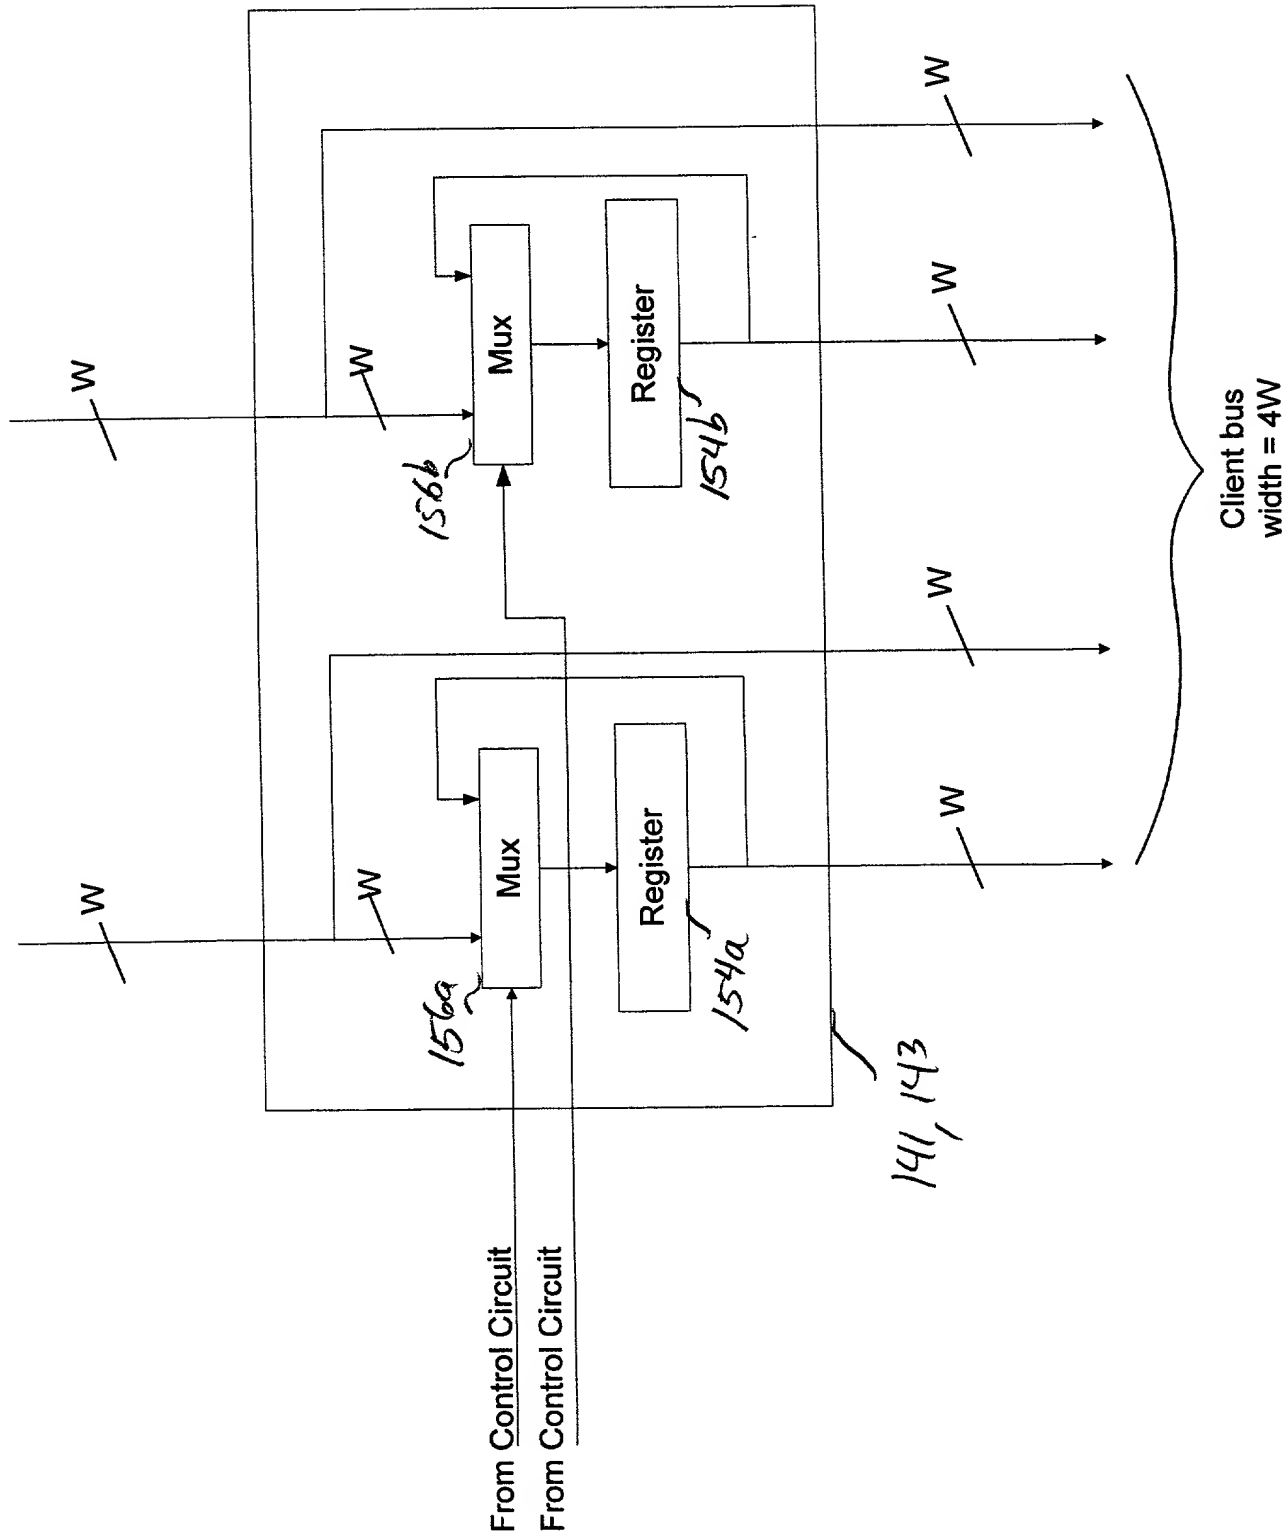


FIG. 6G

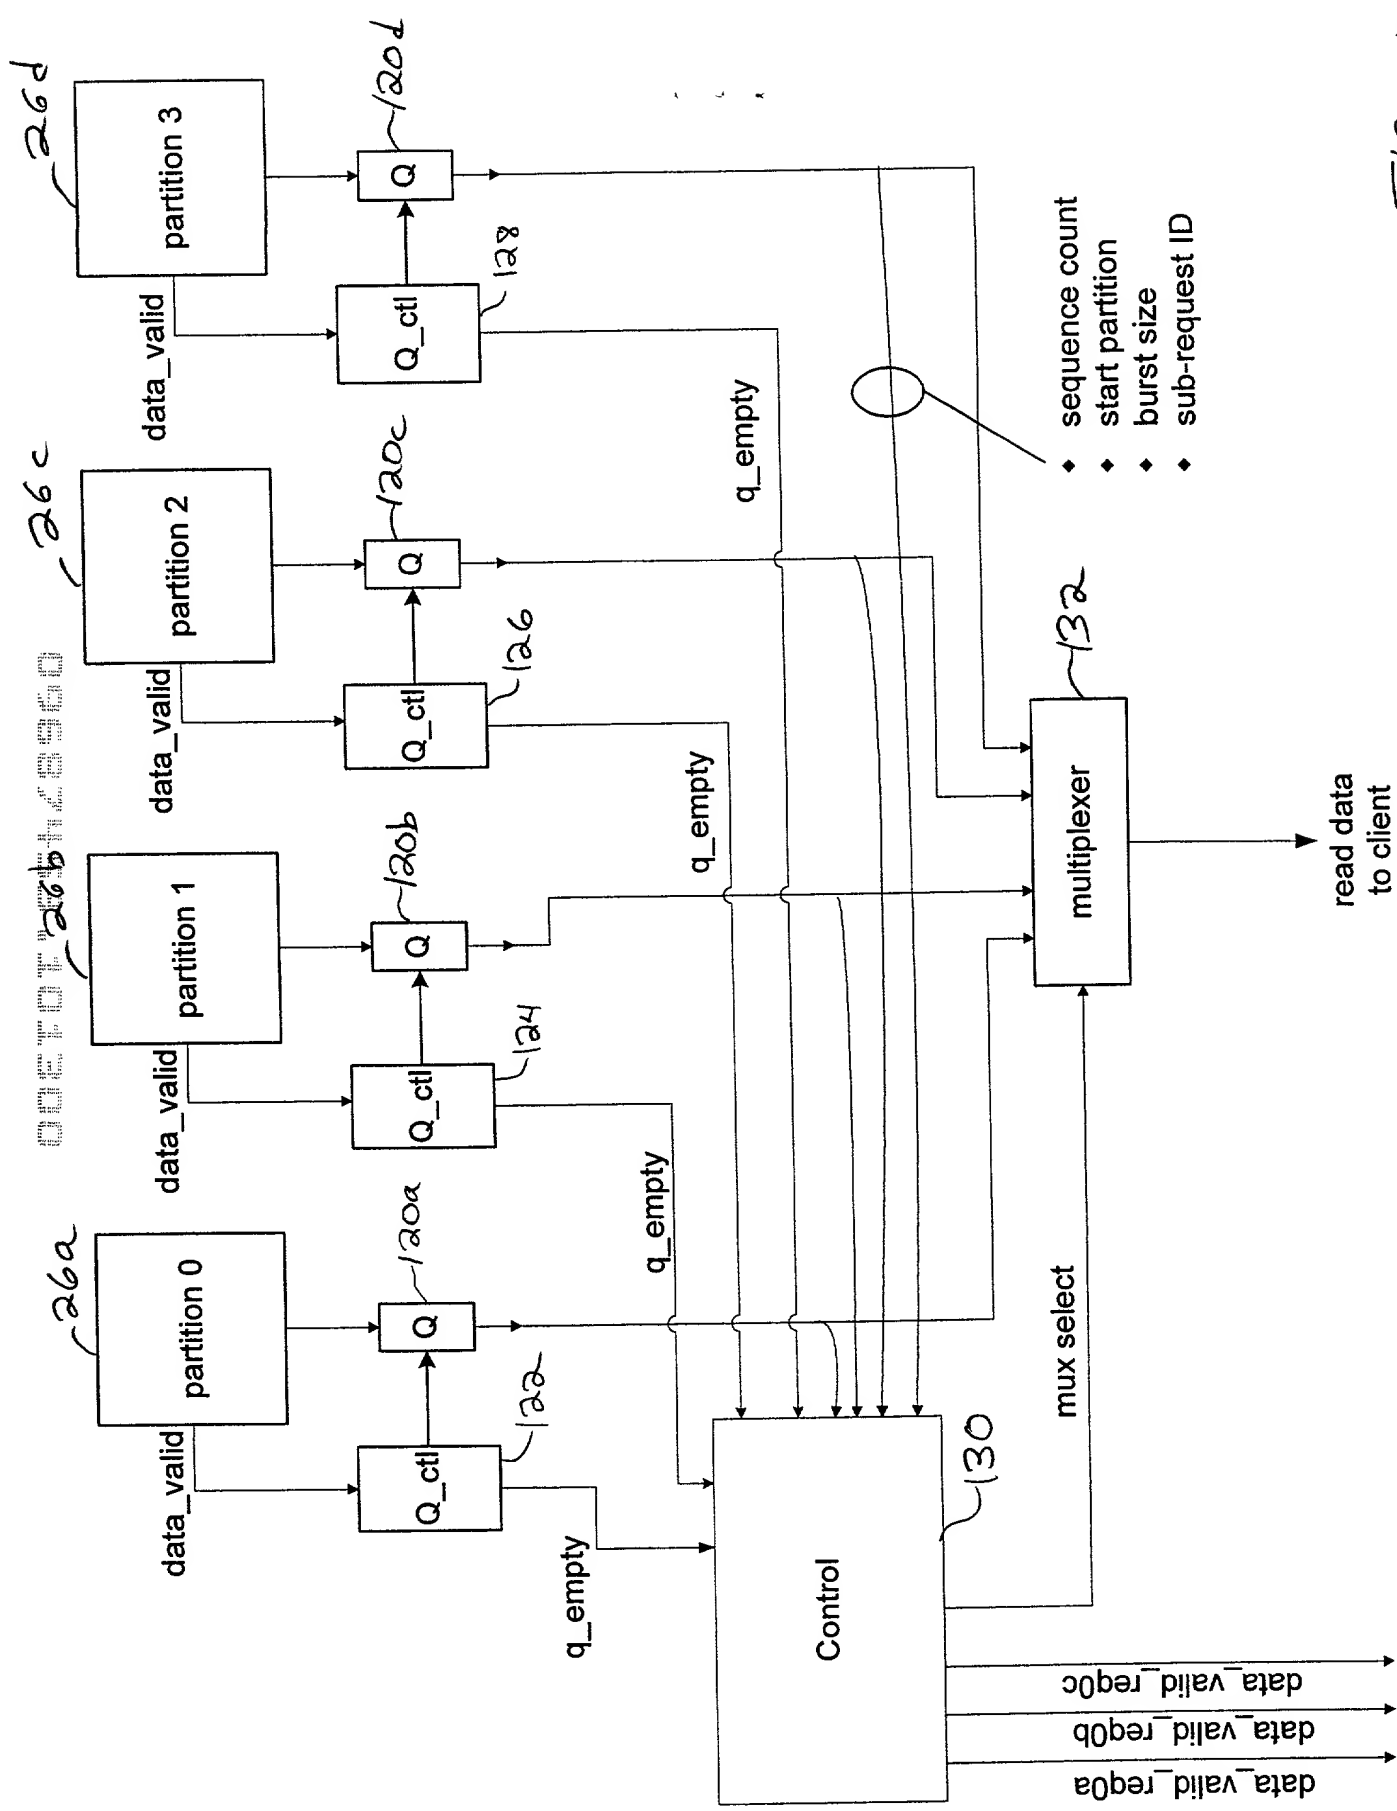
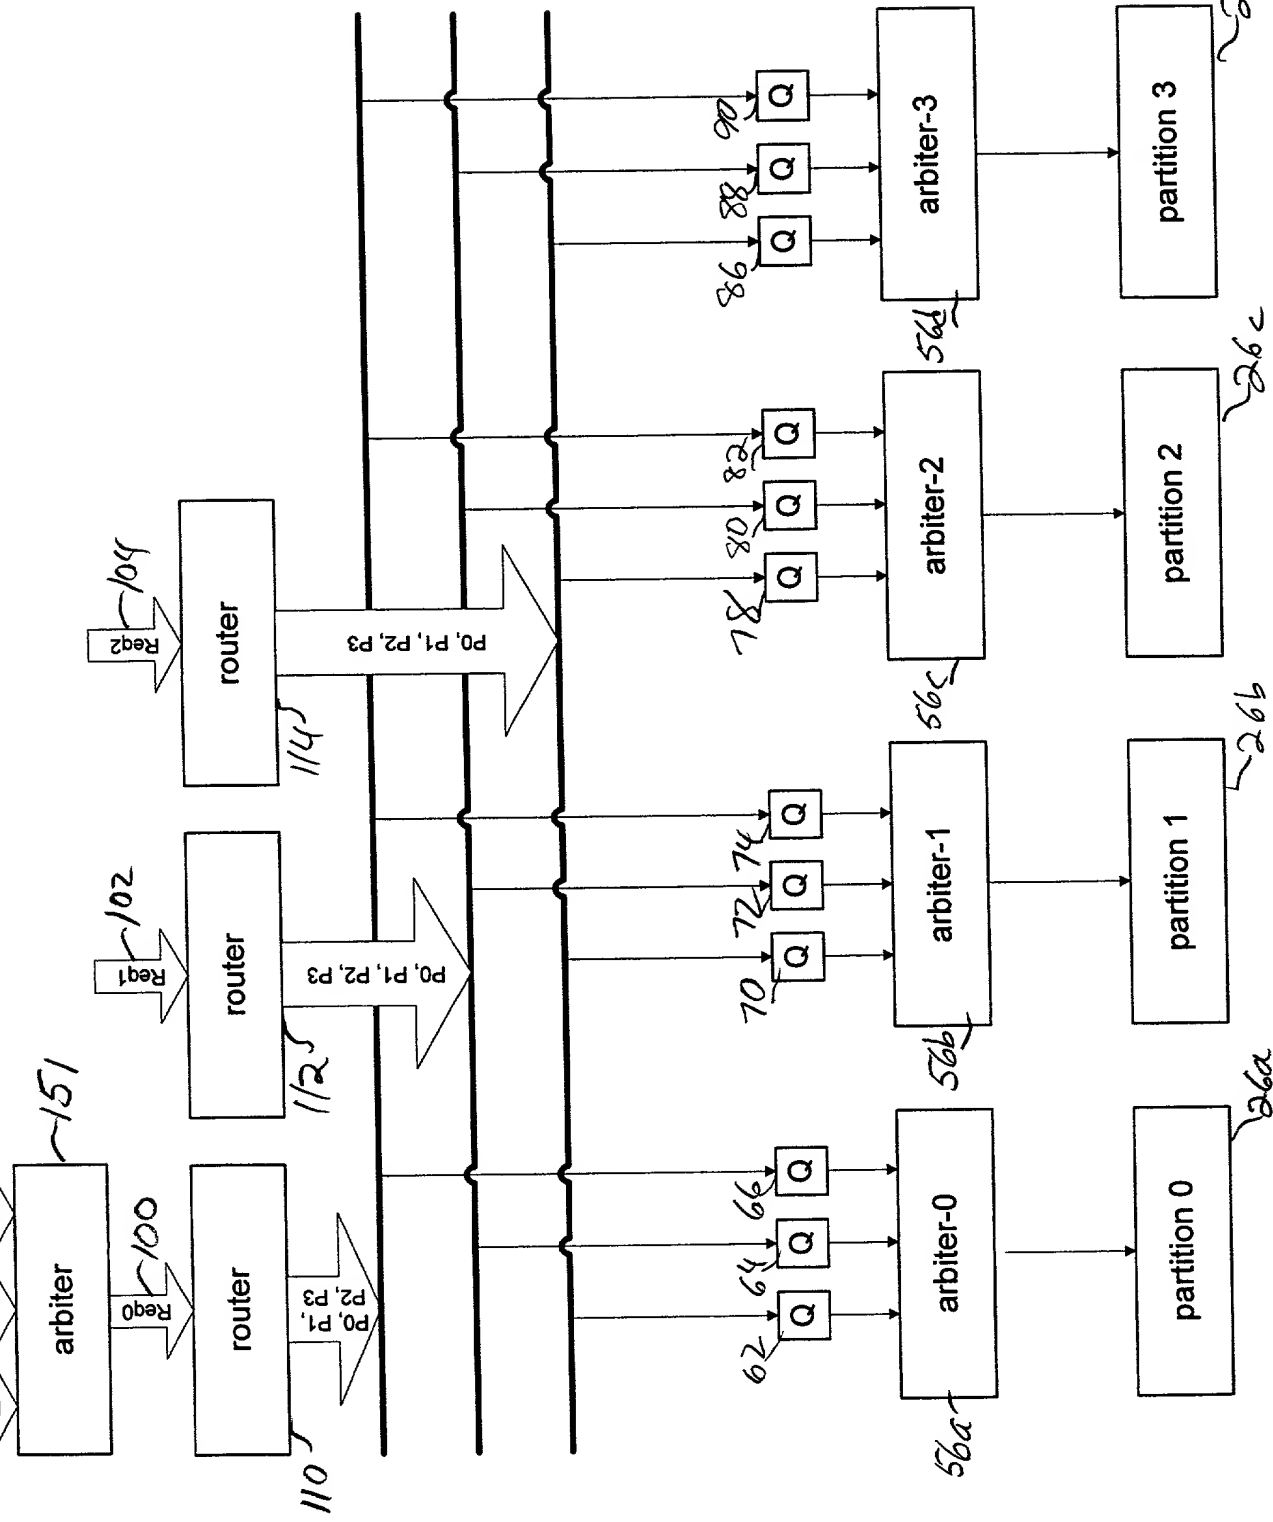


FIG. 6H

153 155 157
Req0c Req0b Req0a
100 102 104
110 112 114




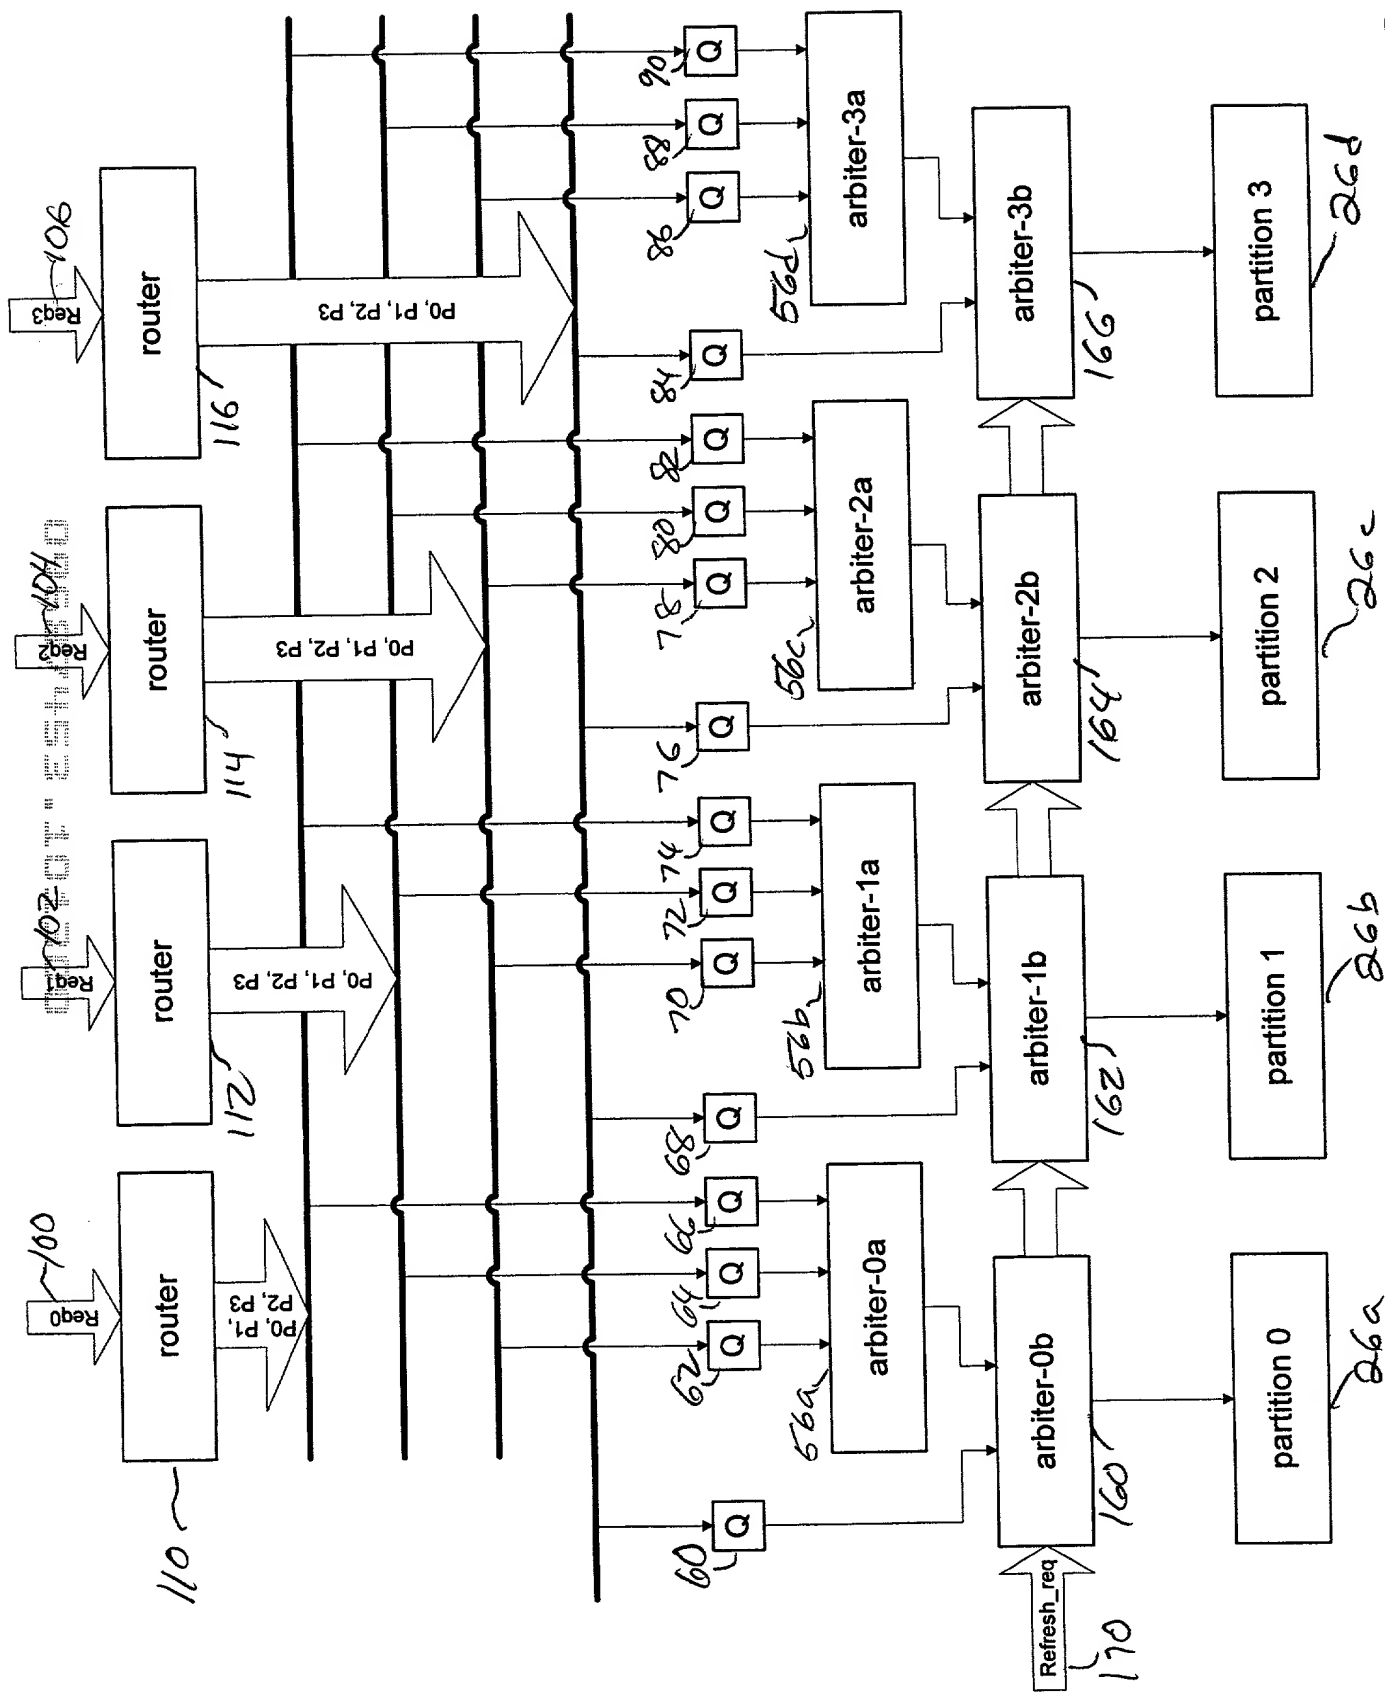


FIG. 8

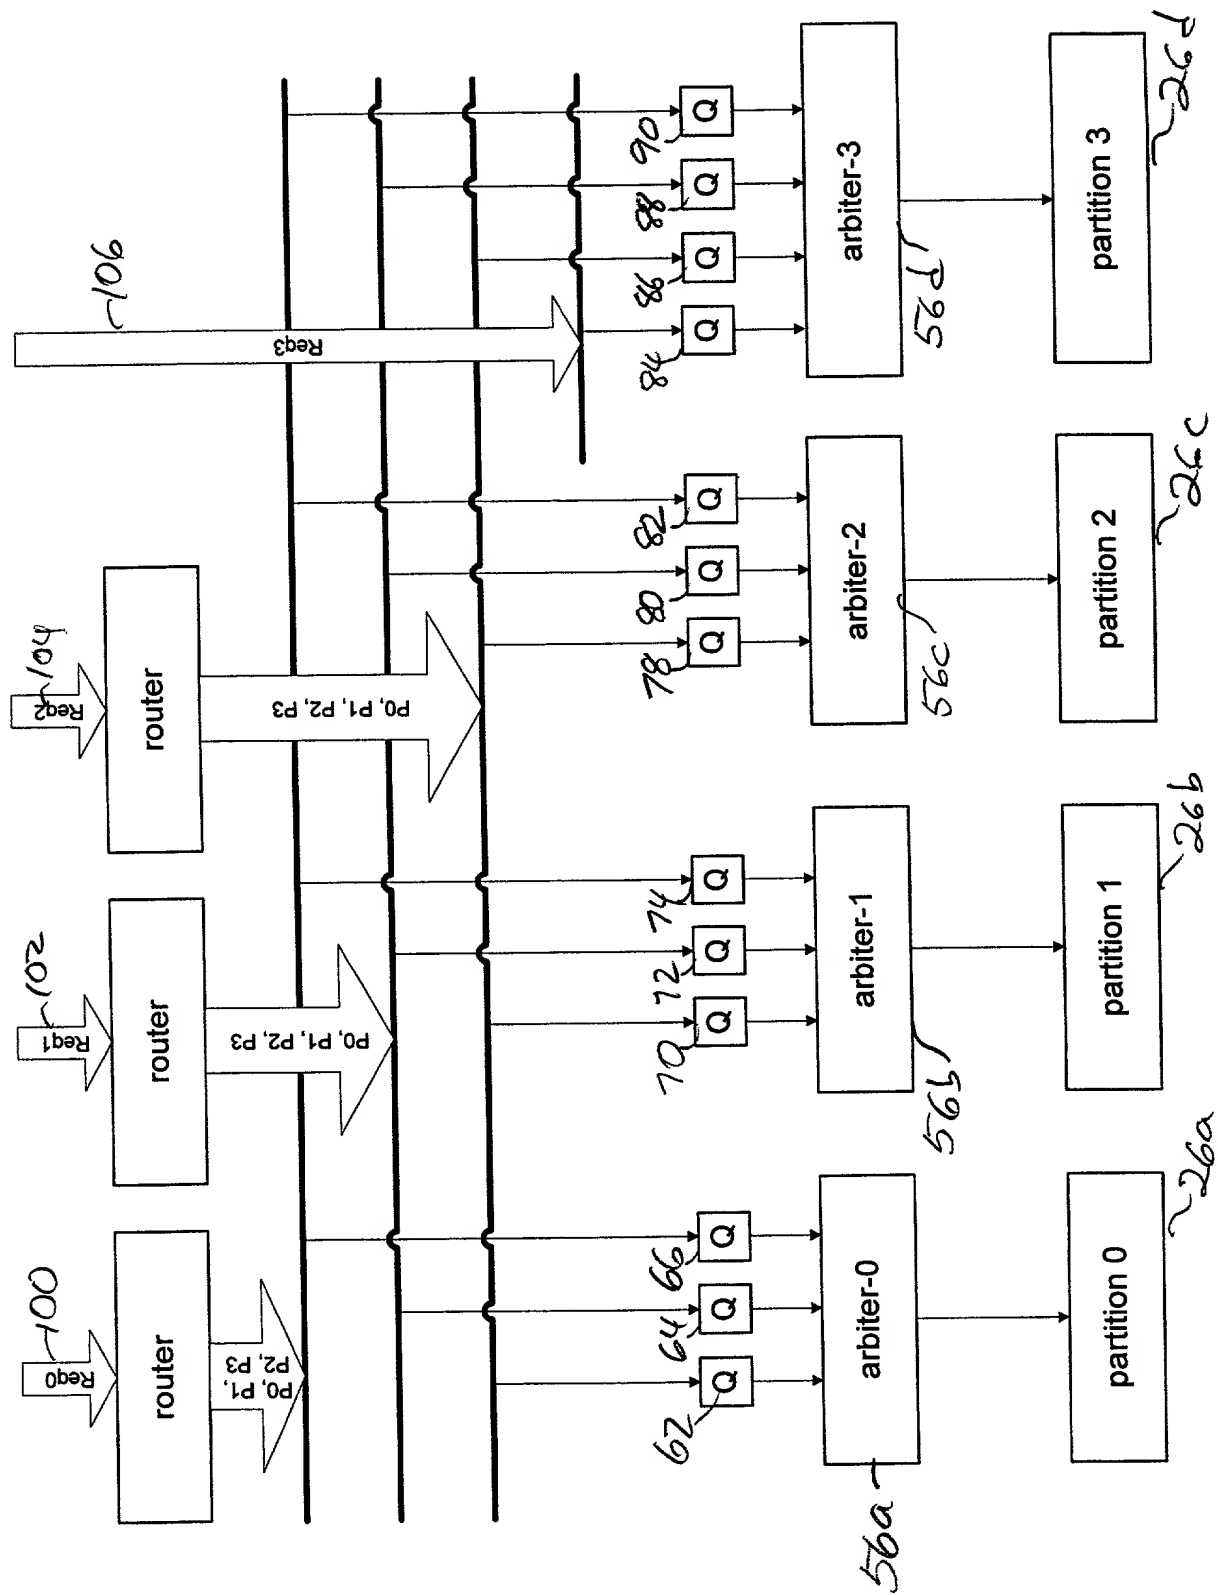

F/G.9

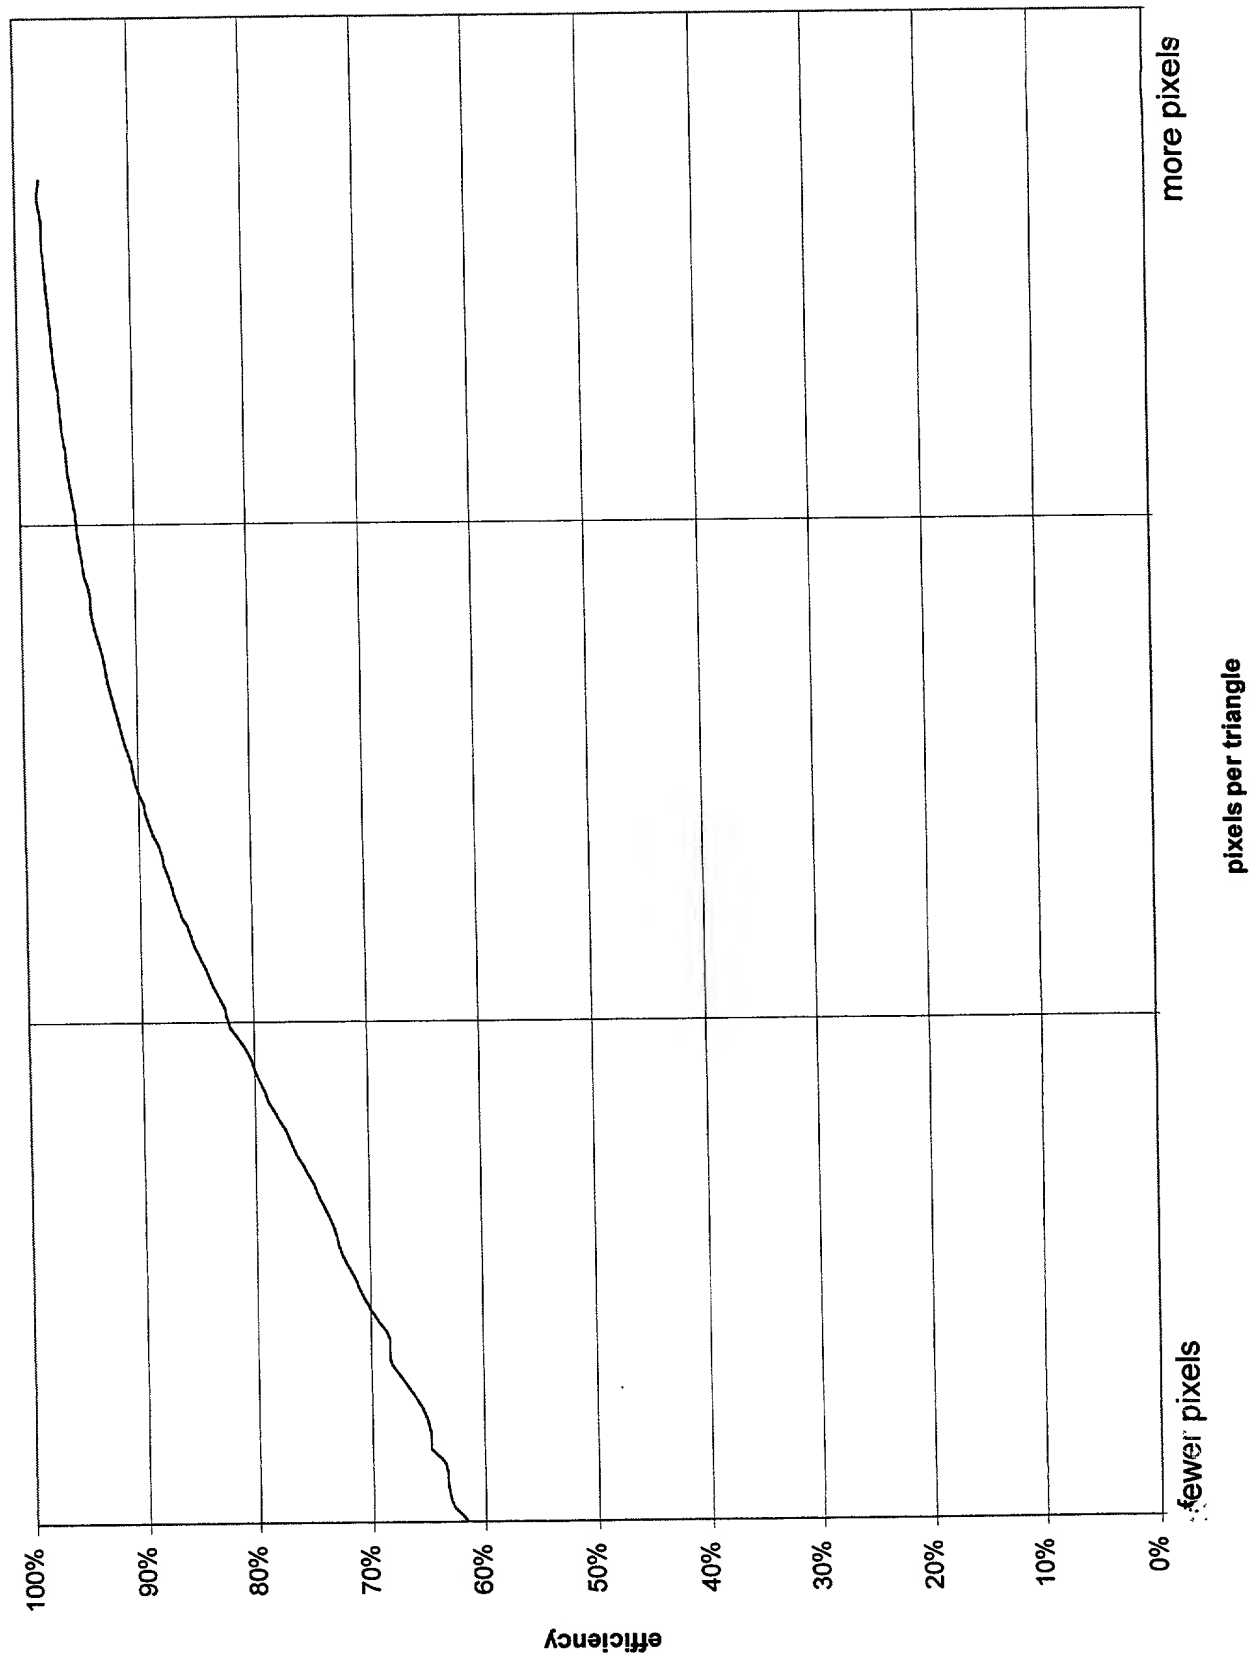


FIG. 10

DECLARATION, POWER OF ATTORNEY AND PETITION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **"A CONTROLLER FOR A MEMORY SYSTEM HAVING MULTIPLE PARTITIONS"** the specification of which

☒ is attached hereto

☐ was filed on _____ as Application Serial No. _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) or U.S. provisional application(s) for patent or inventor's certificate listed below and have also identified below any foreign application or U.S. provisional application(s) for patent or inventor's certificate having a filing date before that of the application of which priority is claimed.

Prior Foreign/U.S. Provisional Application(s)

			Priority Claimed	
(Number)	(Country)	(Day, month, year filed)	Yes	No
____	____	____	____	____
(Number)	(Country)	(Day, month, year filed)	Yes	No
____	____	____	____	____
(Number)	(Country)	(Day, month, year filed)	Yes	No
____	____	____	____	____

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	Filing Date	(Status: Patented, pending, abandoned)
____	____	____
(Application Serial No.)	Filing Date	(Status: Patented, pending, abandoned)
____	____	____

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

And I hereby appoint ; W. POMS, REG. 18,782; G.P. SMITH, REG. 20,142; G. E. LANDE, REG. 22,222; A.C. ROSE, REG. 17,047; L.J. BOVASSO, REG. 24,075; C. BERMAN, REG. 29,249; D.J. OLDENKAMP, REG. 29,421; C. DARROW, REG. 30,166; M.E. HARRIS, REG. 26,690; K.A. MACLEAN, REG. 31,118; C. ROSENBERG, REG. 31,464; M.E. BROWN, REG.

OFFICE OF THE COMPTROLLER OF THE PATENT AND TRADEMARK OFFICE

28,590; S.R. HANSEN, REG. 38,486; D.N. LARSON, REG. 29,401; J.W. INSKEEP, REG. 33,910; H.D. JASTRAM, REG. 19,777; B. CANTER, REG. 34,792; C.J. LERVICK, REG. 35,244; L. CULLMAN, REG. 39,645; C.A.S. HAMRICK, REG. 22,586; R.O. GUILLOT, REG. 28,852; J. BOYCE, REG. 40,920; C. CHOU, REG. 41,672; A.B. DIEPENBROCK III, REG. 39,960; M.K. BOSWORTH, REG. 28,186; L. SHERRY, REG. 43,918; L. McROSS, REG. 40,427; OPPENHEIMER WOLFF & DONNELLY LLP, 1400 Page Mill Road, Palo Alto, California 94304, (650) 320-4000, as my attorneys with full power of substitution and revocation, to prosecute said application and to transact in connection therewith all business in the Patent and Trademark Office and before competent International Authorities.

Address all telephone calls to Claude A. S. Hamrick at (650) 320-4000 and address all correspondence to:

CLAUDE A. S. HAMRICK, ESQ.
OPPENHEIMER WOLFF & DONNELLY LLP
 1400 PAGE MILL ROAD
 PALO ALTO, CALIFORNIA 94304

Wherefore I pray that Letters Patent be granted to me for the invention or discovery described and claimed in the foregoing specification and claims, and I hereby subscribe my name to the foregoing specification and claims, declaration, power of attorney, and this petition.

Full Name of Sole or First Inventor: James M. Van Dyke
 Home Address: 1634 Canary Drive, Sunnyvale, CA 94087
 Post Office Address: Same as above
 Citizenship: USA
 Inventor's Signature: _____ Date: _____

Full Name of Second Inventor: John S. Montrym
 Home Address: 1429 Miravalle Avenue, Los Altos, CA 94024
 Post Office Address: Same as above
 Citizenship: USA
 Inventor's Signature: _____ Date: _____

Full Name of Second Inventor: Steven E. Molnar
 Home Address: 200 Perry Creek Drive, Chapel Hill, Orange County, North Carolina 27514
 Post Office Address: Same as above
 Citizenship: USA
 Inventor's Signature: _____ Date: _____